PAGE	340

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0

SPECIFICATIONS
Current Rating: 7A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: −25℃ ~ +85℃
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)

Part No.: 4200S-2XXTW □-L
1:WITH POST
2:W/O POST

CONTACT	Dimensions	
	A	B
01	---	5.40
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

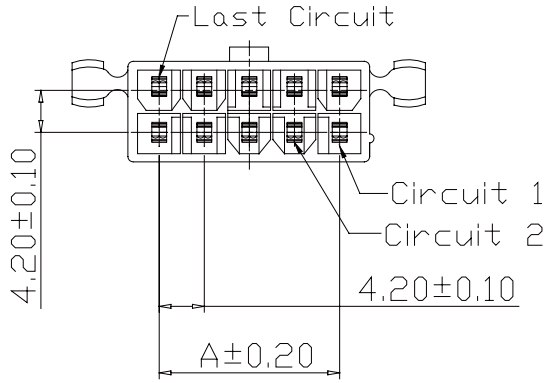

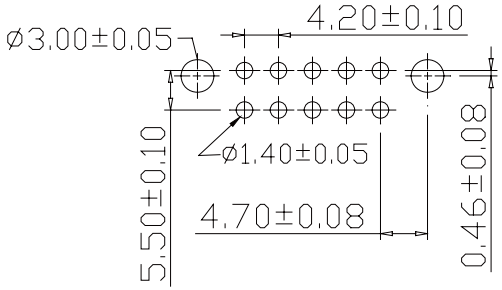

P.C.B LAYOUT

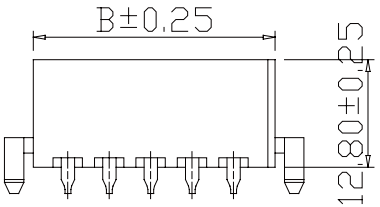



With Post



W/O Post

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200S-2XXTW-L			DESCRIPTION	VIGORTEC
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	