PAGE	339

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

SPECIFICATIONS
Current Rating: 7A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: −25℃ ~ +85℃
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)

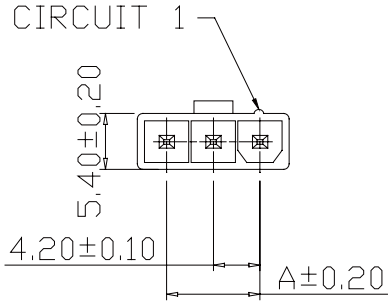





P.C.B LAYOUT

CONTACT	Dimensions	
	A	B
4200SQ-102TW2-L	4.20	9.60
4200SQ-103TW2-L	8.40	13.80
4200SQ-104TW2-L	12.60	18.00
4200SQ-105TW2-L	16.80	22.20

Part No.: 4200SQ-1XXTW2-L

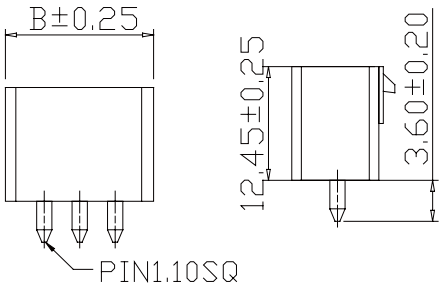

3P

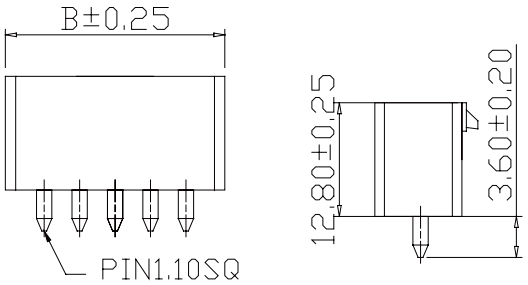

2P,4P5P

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200SQ-1XXTW2-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com