



SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)



PART NO	Dimensions	
	A	B
4200SQ-201TW2-L	---	5.40
4200SQ-201TW2-L	4.20	9.60
4200SQ-201TW2-L	8.40	13.80
4200SQ-201TW2-L	12.60	18.00
4200SQ-201TW2-L	16.80	22.20
4200SQ-201TW2-L	21.00	26.40
4200SQ-201TW2-L	25.20	30.60
4200SQ-201TW2-L	29.40	34.80
4200SQ-201TW2-L	33.60	39.00
4200SQ-201TW2-L	37.80	43.20
4200SQ-201TW2-L	42.00	47.40
4200SQ-201TW2-L	46.20	51.60



P.C.B LAYOUT



PartNo.: 4200SQ-2X X TW 2-L

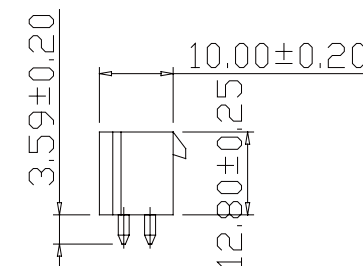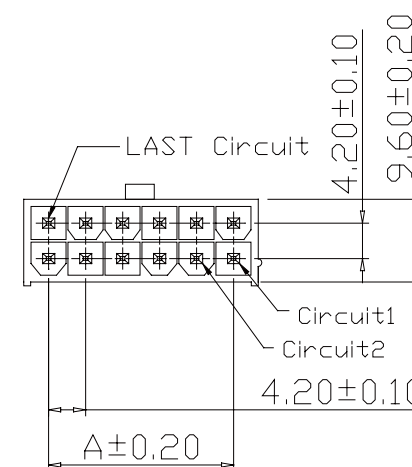

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200SQ-2XXTW2-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	