




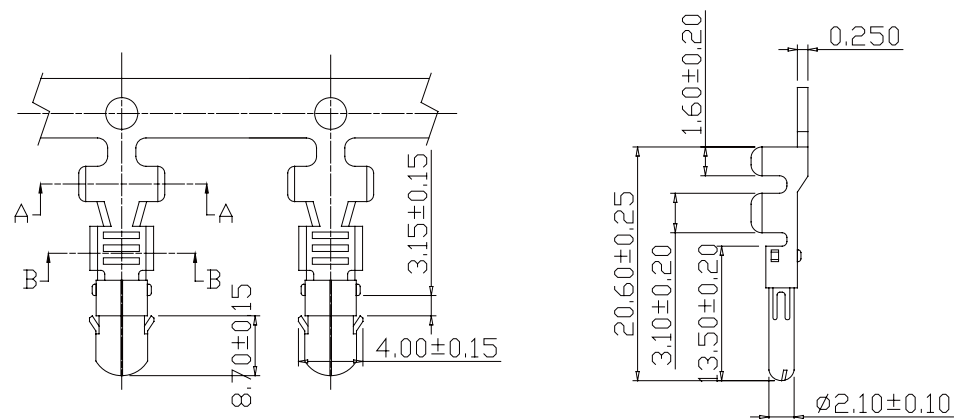

Part No.: 5082-M T-L



SEC: A-A




SEC:B-B



Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#18-#24	2.50mm(max)	Brass	Tin-plated	7,000pcs

SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)

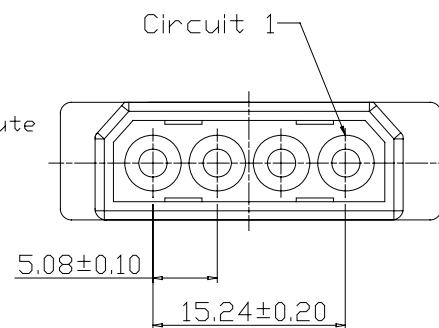

Part No.: 5082H-M 04W -L

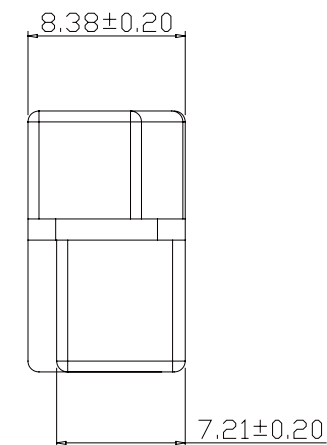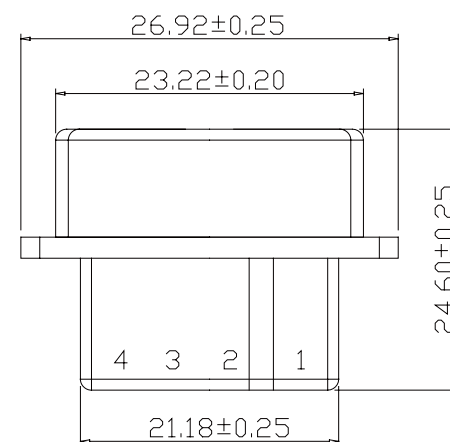

APPRO	CHECK	DRAWN	PART NO.	Part No.:5082H-M04W-L			DESCRIPTION			
			ITEM NO.							
			DRAW NO.							
			UNIT	mm	SCALE	no				
TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069		E-mail: sales@vigortec.com				