

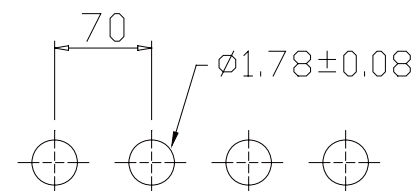
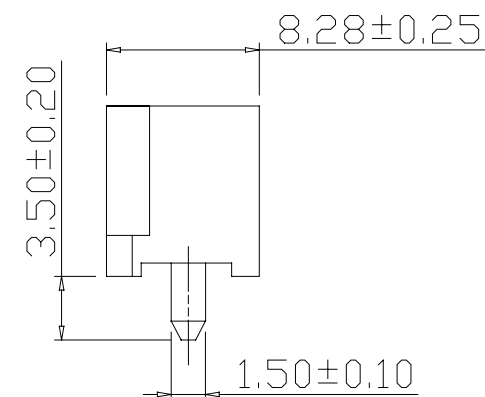


SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-2
 Color: Natural(Translucent)

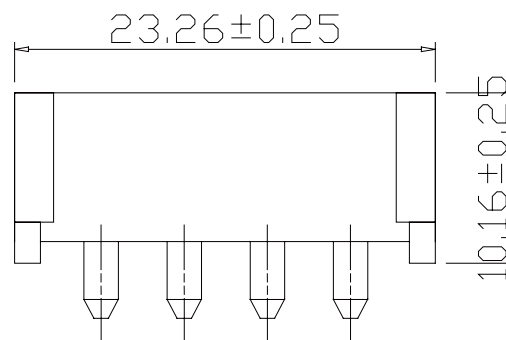

P.C.B LAYOUT

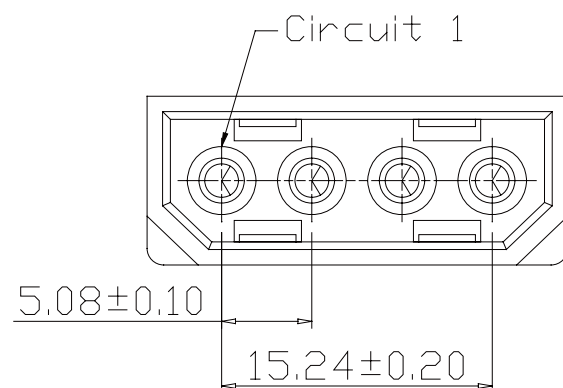

PartNo.:5082S-04TW -L

APPRO	CHECK	DRAWN	PART NO.	Part No.:5082S-04TW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		