

PAGE

344

BY

CHK

REVISION RECORD MODIFICATIONS

DATE


REV.

ALLEN


RELEASE TO PRODUCTION

2007,9,6

1.0

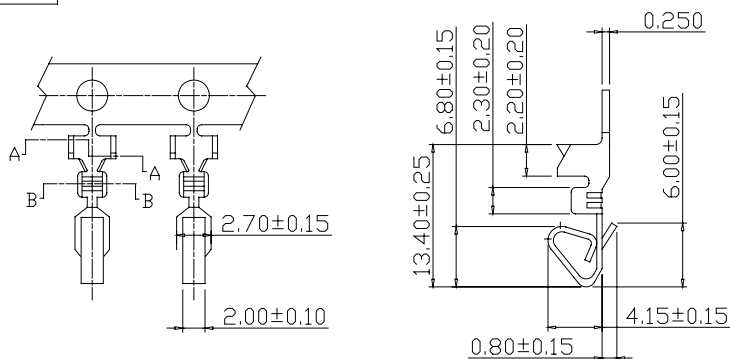

Wire Range	Insulation □.D	Material	Finish	Qty/reel
AWG#18-#24	2.80mm(max)	Brass	Tin-plated	6,000pcs

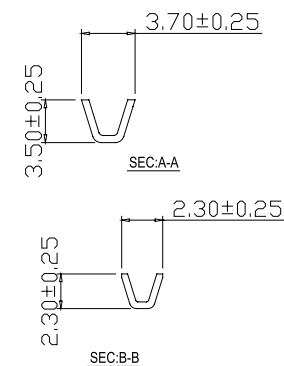

Part No.: 3961-T-L

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000mΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66, UL94V-2

Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083H-02W-L	5.08	10.08
5083H-03W-L	10.16	15.16
5083H-04W-L	15.24	20.24
5083H-05W-L	20.32	25.32
5083H-06W-L	25.40	30.40
5083H-07W-L	30.48	35.48
5083H-08W-L	35.56	40.56
5083H-09W-L	40.64	45.64
5083H-10W-L	45.72	50.72
5083H-11W-L	50.80	55.80
5083H-12W-L	55.88	60.88
5083H-13W-L	60.96	65.96
5083H-14W-L	66.04	71.04
5083H-15W-L	71.12	76.12
5083H-16W-L	76.20	81.20
5083H-17W-L	81.28	86.28
5083H-18W-L	86.36	91.36
5083H-19W-L	91.44	96.44
5083H-20W-L	96.52	101.52

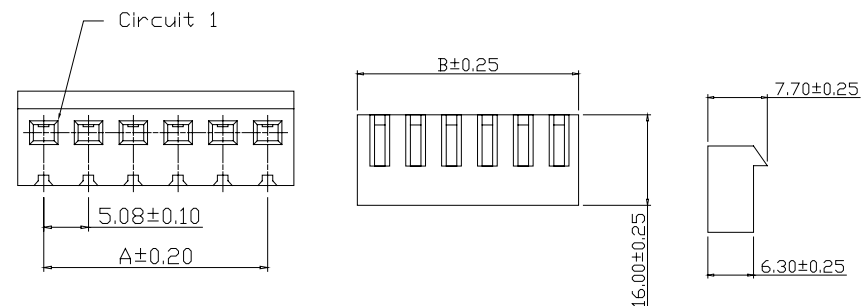

Part No.: 5083H-XXW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.: 5083H-XXW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com