



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0

SPECIFICATIONS
 Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Terminal: Phosphor Bronze/Tin-plated
 Material: Nylon 66, UL94V-2
 Color: Natural(Translucent)

PartNo.: 5083IDC-04W □ -L
 16-18 AWG
 18-18 AWG
 20-20 AWG
 22-22 AWG

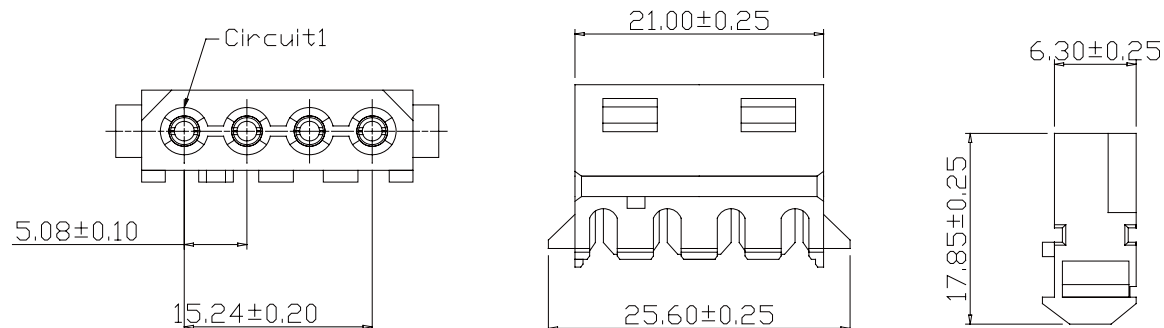

COVER

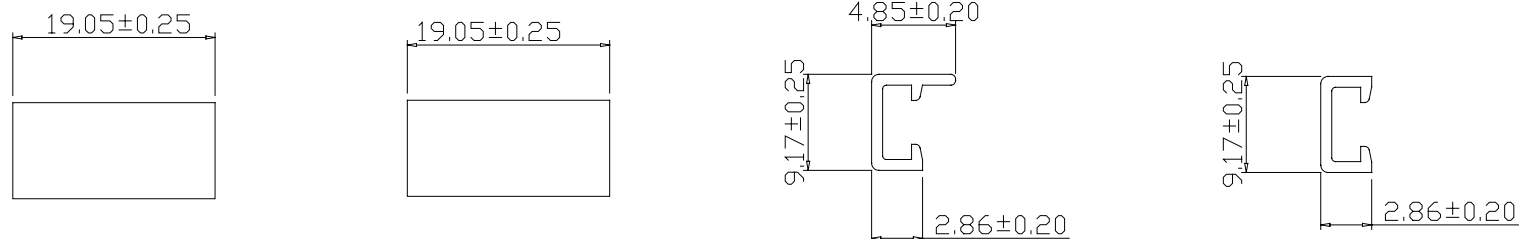

PartNo.: 5083IDC-C-L

APPRO	CHECK	DRAWN	PART NO.	Part No:5083IDC-C-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	