

PAGE	346	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25℃ ~ +85℃

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min





Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated


Material: Nylon 66, UL94V-2

Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083RA-02TW-L	5.08	10.16
5083RA-03TW-L	10.16	15.24
5083RA-04TW-L	15.24	20.32
5083RA-05TW-L	20.32	25.40
5083RA-06TW-L	25.40	30.48
5083RA-07TW-L	30.48	35.56
5083RA-08TW-L	35.56	40.64
5083RA-09TW-L	40.64	45.72
5083RA-10TW-L	45.72	50.80
5083RA-11TW-L	50.80	55.88
5083RA-12TW-L	55.88	60.96
5083RA-13TW-L	60.96	66.04
5083RA-14TW-L	66.04	71.12
5083RA-15TW-L	71.12	76.20
5083RA-16TW-L	76.20	81.28
5083RA-17TW-L	81.28	86.36
5083RA-18TW-L	86.36	91.44
5083RA-19TW-L	91.44	96.52
5083RA-20TW-L	96.52	101.60

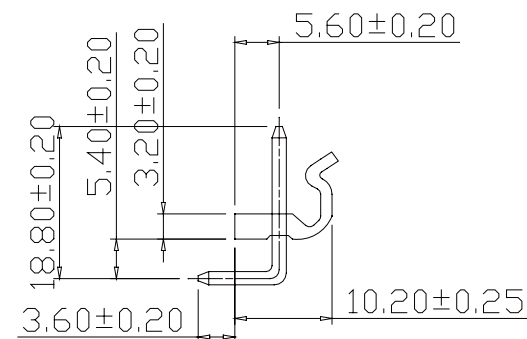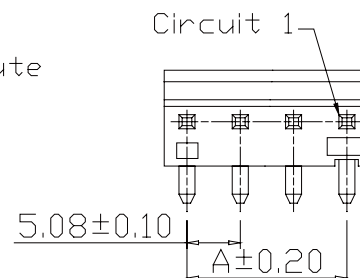

PartNo.:5083RA-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	PartNo.:5083RA-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	