

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: $10\text{m}\Omega$ MaxInsulation Resistance: $1000\text{m}\Omega$ Min





Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66, UL94V-2

Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083RB-02TW-L	5.08	10.16
5083RB-03TW-L	10.16	15.24
5083RB-04TW-L	15.24	20.32
5083RB-05TW-L	20.32	25.40
5083RB-06TW-L	25.40	30.48
5083RB-07TW-L	30.48	35.56
5083RB-08TW-L	35.56	40.64
5083RB-09TW-L	40.64	45.72

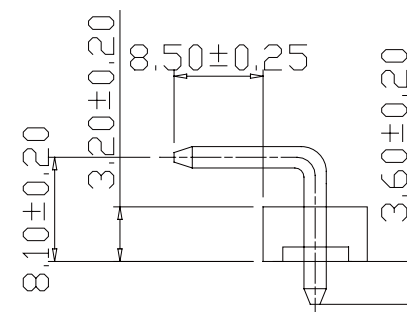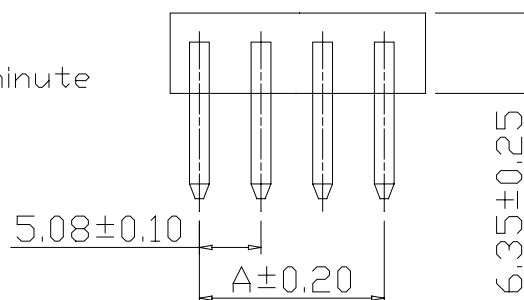

PartNo.: 5083RB-XXTW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.: 5083RB-XXTW-L

DESCRIPTION

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.



Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com