
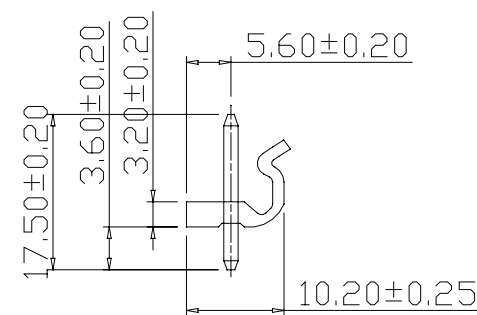




BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0

SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083SA-02TW-L	5.08	10.16
5083SA-03TW-L	10.16	15.24
5083SA-04TW-L	15.24	20.32
5083SA-05TW-L	20.32	25.40
5083SA-06TW-L	25.40	30.48
5083SA-07TW-L	30.48	35.56
5083RA-08TW-L	35.56	40.64
5083SA-09TW-L	40.64	45.72
5083SA-10TW-L	45.72	50.80
5083SA-11TW-L	50.80	55.88
5083SA-12TW-L	55.88	60.96
5083SA-13TW-L	60.96	66.04
5083SA-14TW-L	66.04	71.12
5083SA-15TW-L	71.12	76.20
5083SA-16TW-L	76.20	81.28
5083SA-17TW-L	81.28	86.36
5083SA-18TW-L	86.36	91.44
5083SA-19TW-L	91.44	96.52
5083SA-20TW-L	96.52	101.60

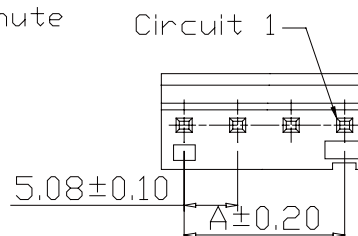

PartNo.: 5083SA-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200SA-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	