



SPECIFICATIONS



Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-2
 Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083SB-02TW-L	5.08	10.16
5083SB-03TW-L	10.16	15.24
5083SB-04TW-L	15.24	20.32
5083SB-05TW-L	20.32	25.40
5083SB-06TW-L	25.40	30.48
5083SB-07TW-L	30.48	35.56
5083SB-08TW-L	35.56	40.64
5083SB-09TW-L	40.64	45.72

PartNo.:5083SB-XXTW -L

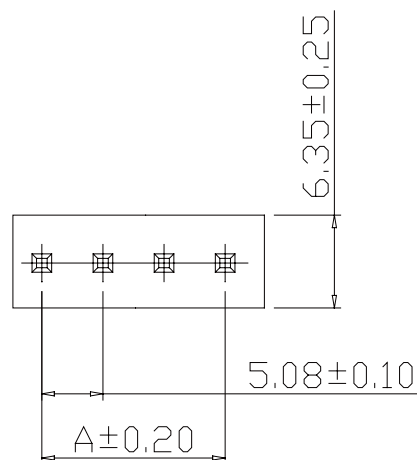

P.C.B LAYOUT

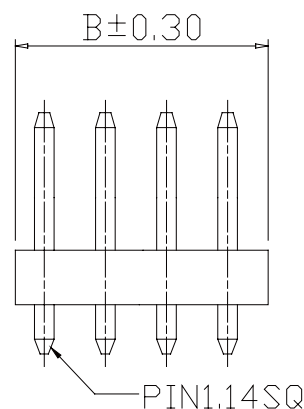

APPRO	CHECK	DRAWN	PART NO.	Part No.:5083SB-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER	NO.	Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com			