PAGE	350

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 1400V AC,DC
Temperature Range: −25℃ ~ +85℃
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 3800V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Material: Nylon 6T, UL94V-0
Color: Natural(Beige)

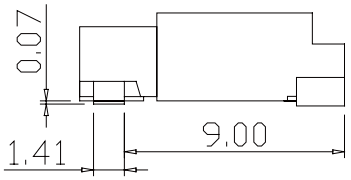



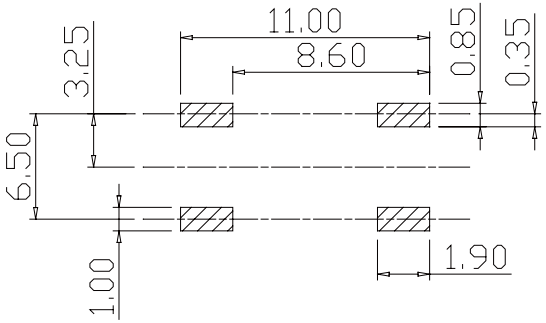

Recommened PCB Layout
(PCB TOLERANGE±0.05)





PartNo.:LCDMR-2P2TW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:LCDMR-2P2TW-U			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com