



## SPECIFICATIONS


Current Rating: 1A AC,DC  
Voltage Rating: 600V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000mΩ Min  
Withstanding Voltage: 1800V AC/minute  
Pin Material: Brass/Tin-plated  
Solder Tabs: Brass/Tin-plated  
Material: Nylon 6T, UL94V-0  
Color: Natural(Beige)




LCDMR-3P2TW





LCDMR-3P3TW




LCDMR-5P2TW




LCDMR-5P3TW




LCDMR-7P2TW





LCDMR-7P3TW




LCDMR-7P4TW



LCDMR-9P5TW



Recommended PCB Layout  
(PCB TOLERANCE $\pm 0.05$ )

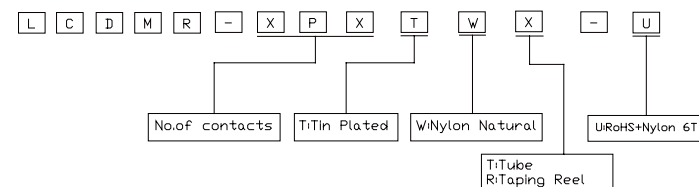

|       |       |       |          |                |       |    |                                                                        |                                                                                       |  |
|-------|-------|-------|----------|----------------|-------|----|------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|
| APPRO | CHECK | DRAWN | PART NO. | LCDMR-XPXTWX-U |       |    | DESCRIPTION                                                            |  |  |
|       |       |       | ITEM NO. |                |       |    |                                                                        |                                                                                       |  |
|       |       |       | DRAW NO. |                |       |    |                                                                        |                                                                                       |  |
|       |       |       | UNIT     | mm             | SCALE | no |                                                                        |                                                                                       |  |
|       |       |       | TOLER    |                | NO.   |    | Tel: 0769 22020068    Fax: 0769 22020069    E-mail: sales@vigortec.com |                                                                                       |  |