

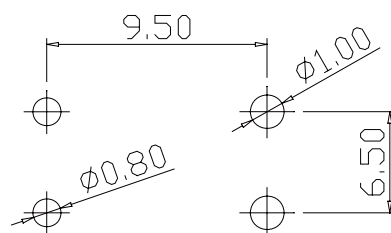
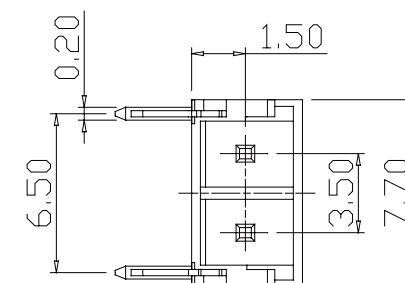
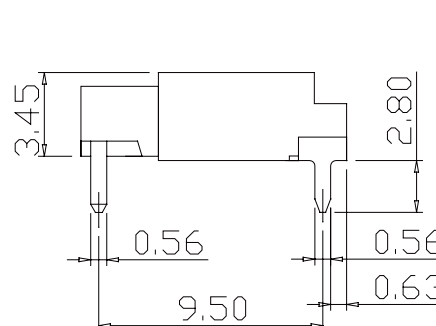


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 1400V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 3800V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Material: Nylon 6T, UL94V-0
Color: Natural(Beige)



Recommended PCB Layout
(PCB TOLERANCE±0.05)



PartNo.:LCDR-2P2TW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:LCDR-2P2TW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	