



PAGE	349	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

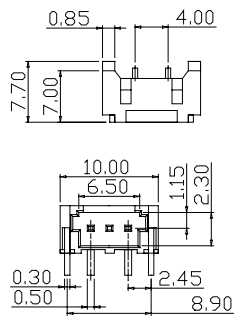


LCDMR-3P2TW

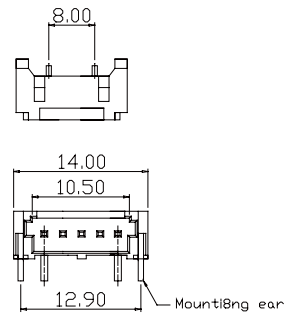


LCDMR-5P2TW

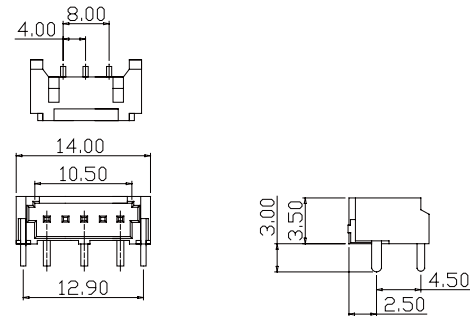


LCDMR-5P3TW

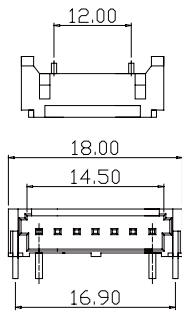


LCDMR-7P2TW

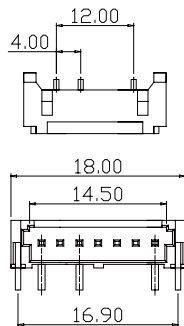



LCDMR-7P3TW

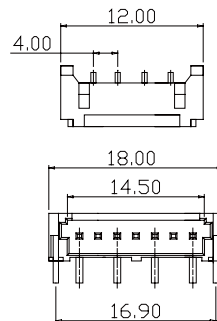


LCDMR-7P4TW

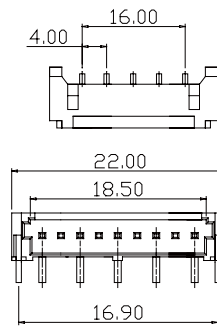

LCDMR-9P5TW

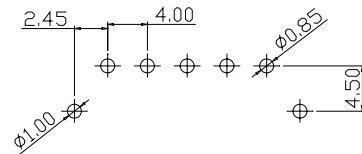

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

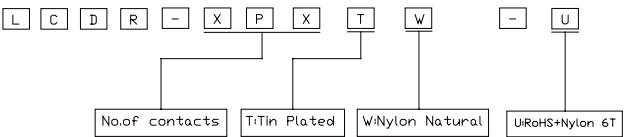

APPRO	CHECK	DRAWN	PART NO.	LCDR-XPXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	