


PAGE	257	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007.8.27	1.0

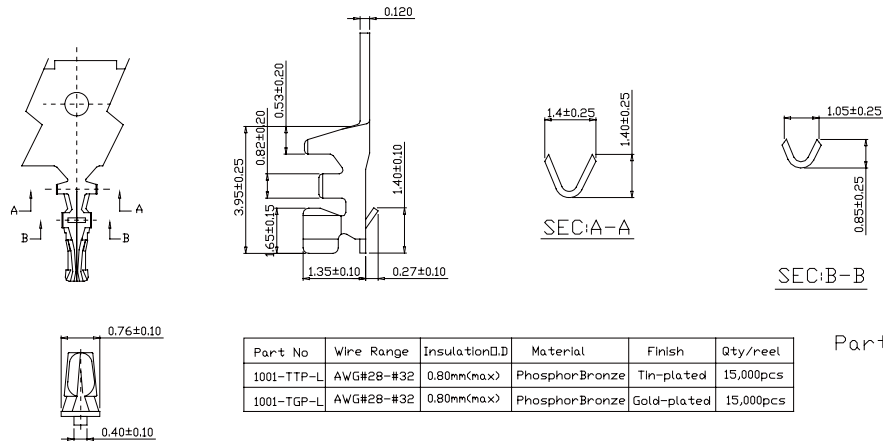

Part No	Wire Range	Insulation D.D	Material	Finish	Qty/reel
1001-TTP-L	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Tin-plated	15,000pcs
1001-TGP-L	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Gold-plated	15,000pcs

Part No.:1001-T-L



SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Material: PBT, UL94V-0
Color: Natural(White)




Part No.:1001H-1XXW□-L

1:WITH BUMP
2:W/O BUMP


CONTACT	Dimensions	
	A	B
2	1.00	5.00
3	2.00	6.00
4	3.00	7.00
5	4.00	8.00
6	5.00	9.00
7	6.00	10.00
8	7.00	11.00
9	8.00	12.00
10	9.00	13.00
11	10.00	14.00
12	11.00	15.00
13	12.00	16.00
14	13.00	17.00
15	14.00	18.00
16	15.00	19.00
17	16.00	20.00
18	17.00	21.00
19	18.00	22.00
20	19.00	23.00

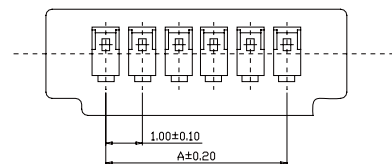

WITH BUMP



W/O BUMP



APPRO	CHECK	DRAWN	PART NO.	Part No.:1001H-1XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com