


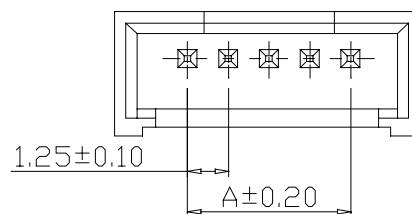


SPECIFICATIONS


Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: 472C

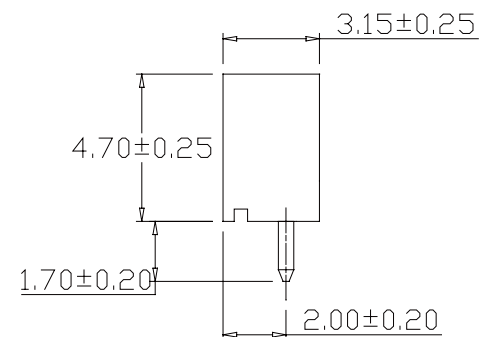

PART NO.	Dimensions	
	A	B
1251S-02TR-L	1.25	4.25
1251S-03TR-L	2.50	5.50
1251S-04TR-L	3.75	6.75
1251S-05TR-L	5.00	8.00
1251S-06TR-L	6.25	9.25
1251S-07TR-L	7.50	10.50
1251S-08TR-L	8.75	11.75
1251S-09TR-L	10.00	13.00
1251S-10TR-L	11.25	14.25
1251S-11TR-L	12.50	15.50
1251S-12TR-L	13.75	16.75
1251S-13TR-L	15.00	18.00
1251S-14TR-L	16.25	19.25
1251S-15TR-L	17.50	20.50

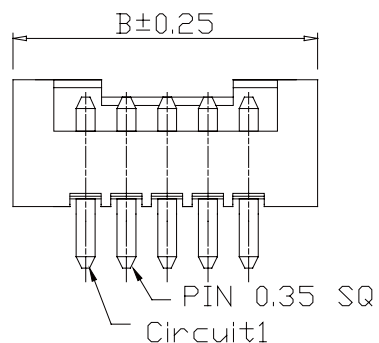

Part No.:1251S-XXTR-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:1251S-XXTR-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								