




PAGE	257	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007.8.27	1.0

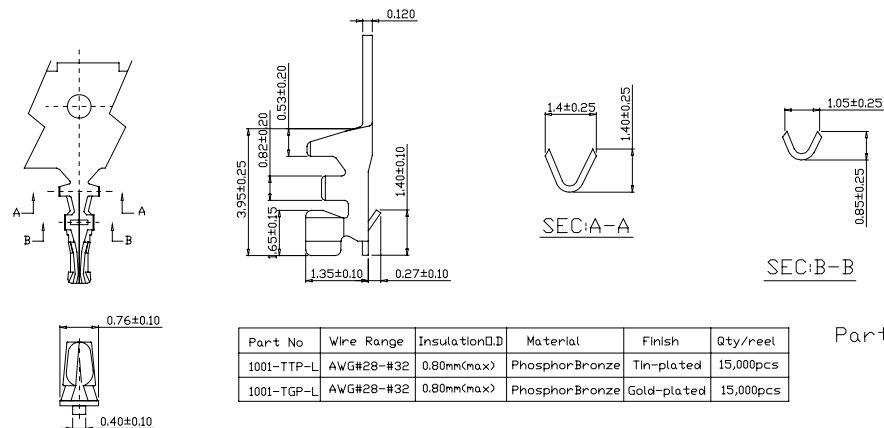

Part No.:1001-T-L

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25℃ ~ +85℃
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Material: PBT, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
1001H-206W-L	5.00	9.00
1001H-208W-L	7.00	11.00
1001H-210W-L	9.00	13.00
1001H-215W-L	14.00	18.00
1001H-220W-L	19.00	23.00
1001H-225W-L	24.00	28.00

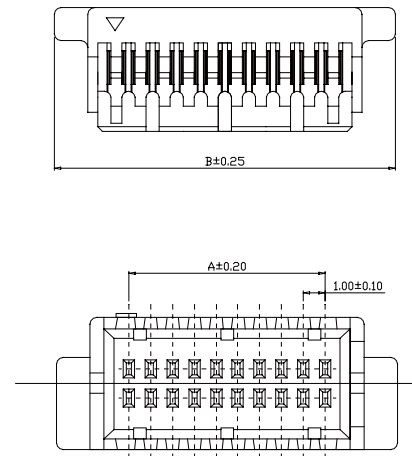

Part No.:1001H-2XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:1001H-2XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	