

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: $20\text{m}\Omega$ MaxInsulation Resistance: $100\text{m}\Omega$ Min

Withstanding Voltage: 500V AC/minute




Pin Material: Phosper Bronze/Tin-plated

Solder Tabs: Phosper Bronze/Tin-plated


Material: Nylon 6T, UL94V-0

Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1001MR-102TW-U	1.00	4.00
1001MR-103TW-U	2.00	5.00
1001MR-104TW-U	3.00	6.00
1001MR-105TW-U	4.00	7.00
1001MR-106TW-U	5.00	8.00
1001MR-107TW-U	6.00	9.00
1001MR-108TW-U	7.00	10.00
1001MR-109TW-U	8.00	11.00
1001MR-110TW-U	9.00	12.00
1001MR-111TW-U	10.00	13.00
1001MR-112TW-U	11.00	14.00
1001MR-113TW-U	12.00	15.00
1001MR-114TW-U	13.00	16.00
1001MR-115TW-U	14.00	17.00
1001MR-116TW-U	15.00	18.00
1001MR-117TW-U	16.00	19.00
1001MR-118TW-U	17.00	20.00
1001MR-119TW-U	18.00	21.00
1001MR-120TW-U	19.00	22.00

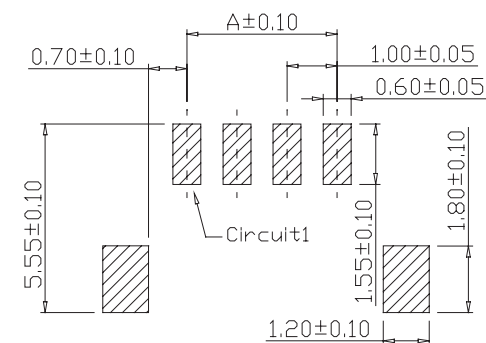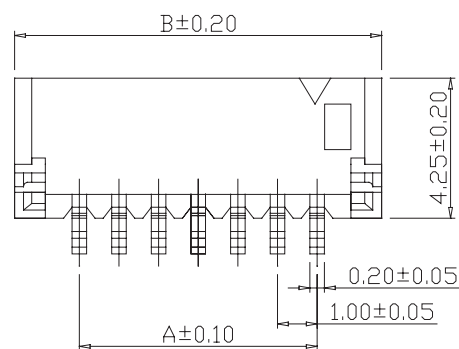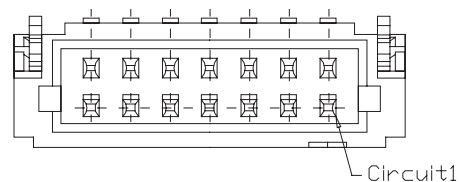

PCB LAYOUT



Part No:1001MR-1XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No:1001MR-1XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	