

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: $20\text{m}\Omega$ MaxInsulation Resistance: $100\text{m}\Omega$ Min

Withstanding Voltage: 500V AC/minute




Pin Material: Phosper Bronze/Tin-plated

Solder Tabs: Phosper Bronze/Tin-plated

Material: Nylon 6T, UL94V-0

Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1001MR-206TW-U	5.00	9.10
1001MR-208TW-U	7.00	11.10
1001MR-210TW-U	9.00	13.10
1001MR-215TW-U	14.00	18.10
1001MR-220TW-U	19.00	23.10
1001MR-225TW-U	24.00	28.10

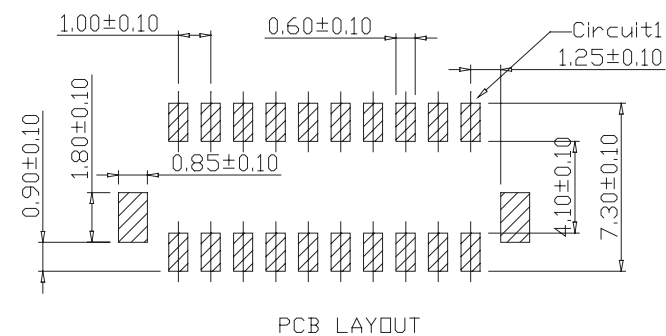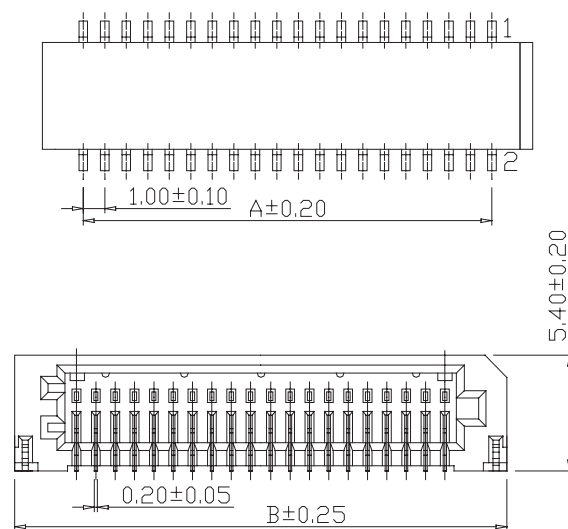

Part No.:1001MR-2XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:1001MR-2XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		