

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100mΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material: Phosper Bronze/Tin-plated



Solder Tabs: Phosper Bronze/Tin-plated

Wafer: Nylon 6T, UL94V-0


Cap: Nylon 6T, UL94V-0, Natural(Beige)

Color: Natural(Beige)



PART NO.	Dimensions	
	A	B
1001MS-102TW-U	1.00	4.00
1001MS-103TW-U	2.00	5.00
1001MS-104TW-U	3.00	6.00
1001MS-105TW-U	4.00	7.00
1001MS-106TW-U	5.00	8.00
1001MS-107TW-U	6.00	9.00
1001MS-108TW-U	7.00	10.00
1001MS-109TW-U	8.00	11.00
1001MS-110TW-U	9.00	12.00
1001MS-111TW-U	10.00	13.00
1001MS-112TW-U	11.00	14.00
1001MS-113TW-U	12.00	15.00
1001MS-114TW-U	13.00	16.00
1001MS-115TW-U	14.00	17.00
1001MS-116TW-U	15.00	18.00
1001MS-117TW-U	16.00	19.00
1001MS-118TW-U	17.00	20.00
1001MS-119TW-U	18.00	21.00
1001MS-120TW-U	19.00	22.00

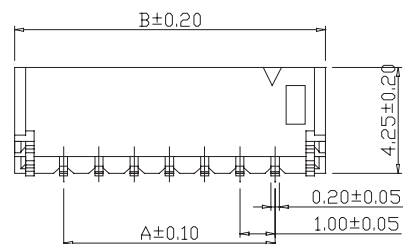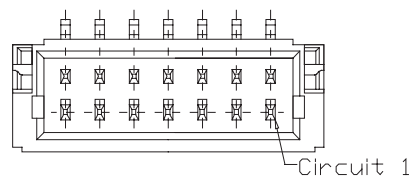

Part No.:1001MR-1XXTW-U

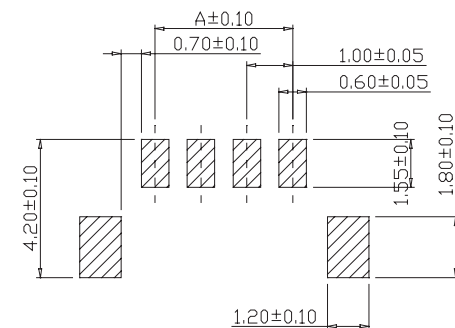

PCB LAYOUT



APPRO

CHECK

DRAWN

PART NO.

Part No.:1001MR-1XXTW-U

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel:0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com