BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: −25℃ ~ +85℃
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosper Bronze/Tin-plated
Solder Tabs: Phosper Bronze/Tin-plated
Wafer: Nylon 6T, UL94V-0
Cap: Nylon 6T, UL94V-0, Natural(Beige)
Color: Natural(Beige)

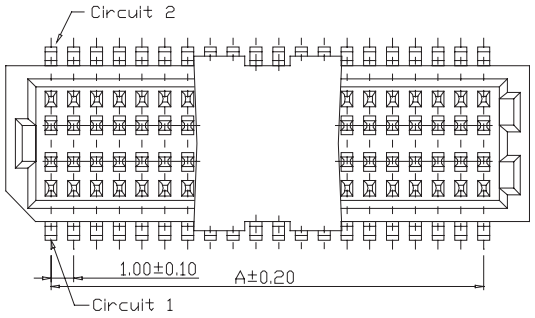

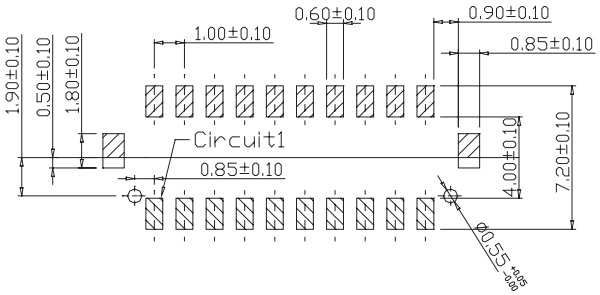

PCB LAYOUT

CONTACT	Dimensions	
	A	B
06	5.00	8.30
08	7.00	10.30
10	9.00	12.30
15	14.00	17.30
20	19.00	22.30
25	24.00	27.30

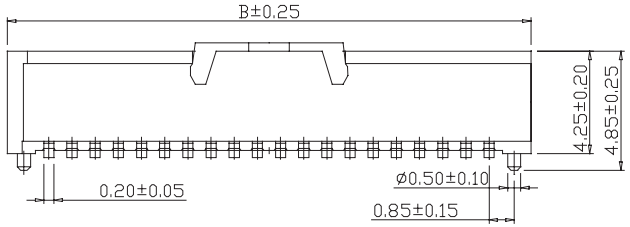

Part No.:1001MR-2XXTW□-U
1:WITH PLST
2:W/O PLST



WIH POST



W/O POST

APPRO	CHECK	DRAWN	PART NO.	Part No.:1001MR-2XXTW-U			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com