
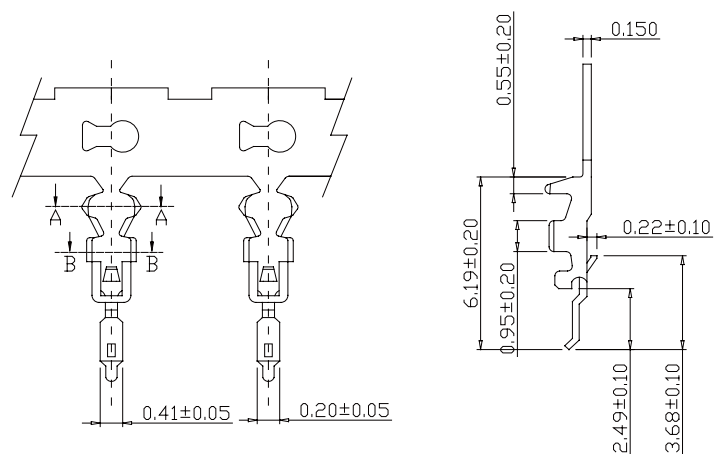


SEC:A-A



SEC:B-B

Wire Range	Insulation D.D	Material	Finish	Qty/reel
Wire Range	0.50mm(max)	Phosphor Bronze	Gold-flash	15,000pcs




Part No.:1002T-L

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $20\text{m}\Omega$ Max
 Insulation Resistance: $100\text{m}\Omega$ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosper Bronze/Tin-plated
 Solder Tabs: Phosper Bronze/Tin-plated
 Wafer: Nylon 6T, UL94V-0
 Cap: Nylon 6T, UL94V-0, Natural(Beige)
 Color: Natural(Beige)

PART NO.	Dimensions		
	A	B	C
1002H-20W-U	19.00	21.88	23.28
1002H-30W-U	29.00	31.88	33.28

Part No.:1002H-XXW-U

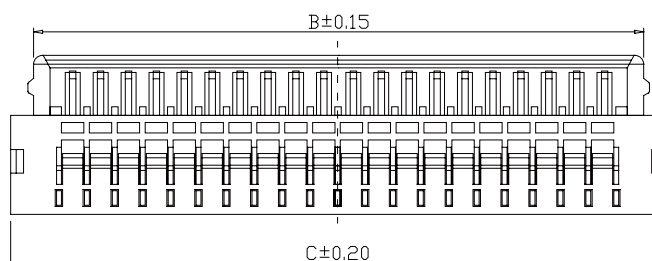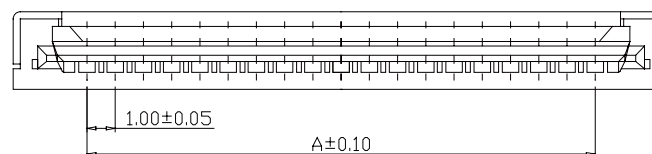

APPRO

CHECK

DRAWN

PART NO.

Part No.:1002H-XXTW-U

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com