




BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

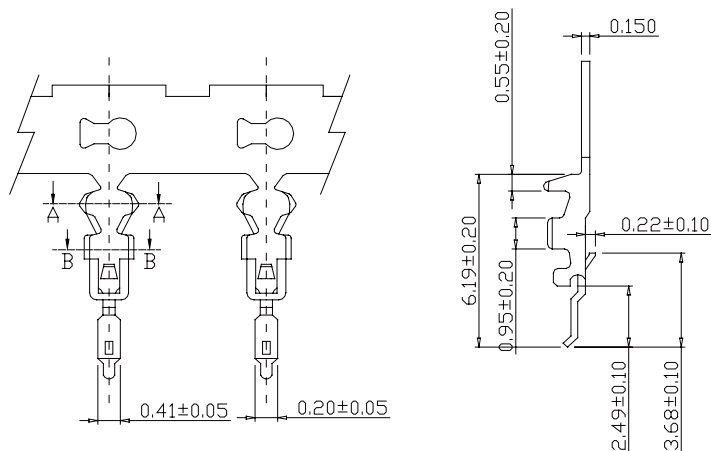

SEC:A-A





SEC:B-B

Wire Range	Insulation O.D	Material	Finish	Qty/reel
Wire Range	0.50mm(max)	Phosphor Bronze	Gold-flash	15,000pcs

Part No.:1002T-L



SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosper Bronze/Tin-plated
Solder Tabs: Phosper Bronze/Tin-plated
Wafer: Nylon 6T, UL94V-0
Cap: Nylon 6T, UL94V-0, Natural(Beige)
Color: Natural(Beige)

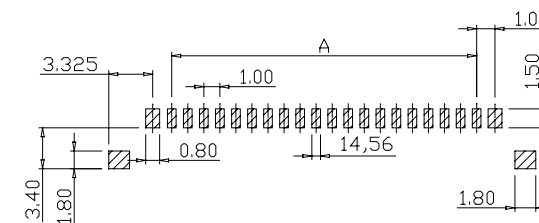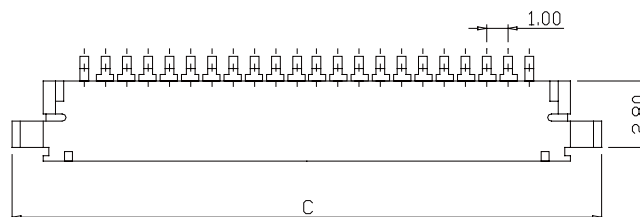

PART NO.	Dimensions		
	A	B	C
1002MR-20TW-U	19.00	21.00	26.65
1002MR-30TW-U	29.00	31.00	36.65

Part No.:1002MR-XXTW-U

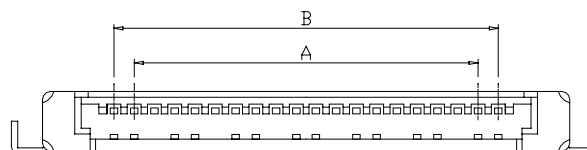

PCB Layout

APPRO	CHECK	DRAWN	PART NO.	Part No.:1002MR-XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								