





PAGE	262	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0



Part No:1003H-T-L

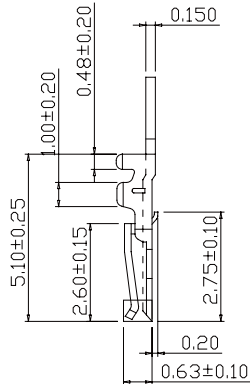




SEC:A-A



SEC:B-B

Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#28-#32	0.60mm(max)	Phosphor Bronze	Gold-flash	15,000pcs

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Shell: Phosphor Bronze/Nickel-plated
 Material: Nylon 46, UL94V-0
 Color: Natural(Beige)

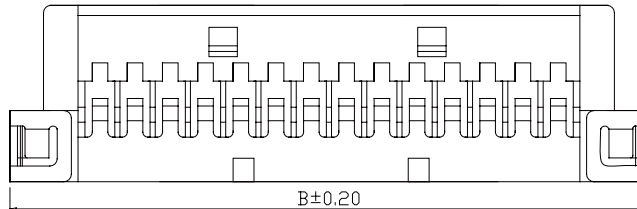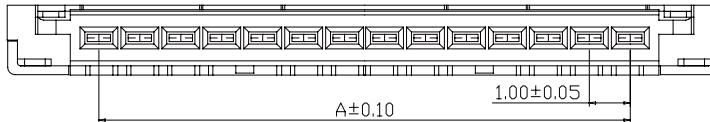

Part No:1003H-XXW-U

PART NO.	Dimensions	
	A	B
1003H-08W-U	7.00	11.95
1003H-14W-U	13.00	17.95
1003H-20W-U	19.00	23.95
1003H-30W-U	29.00	33.95

APPRO	CHECK	DRAWN	PART NO.	Part No.:1003H-XXW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	