





PAGE	263	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin-plated
Solder Tabs: Phosphor Bronze/Tin-plated
Material: Nylon 6T, UL94V-0
Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1250MS-02TW-U	1.25	7.75
1250MS-03TW-U	2.25	9.00
1250MS-04TW-U	3.75	10.25
1250MS-05TW-U	5.00	11.50
1250MS-06TW-U	6.25	12.75
1250MS-07TW-U	7.50	14.00
1250MS-08TW-U	8.75	15.25
1250MS-09TW-U	10.00	16.50
1250MS-10TW-U	11.25	17.75
1250MS-11TW-U	12.50	19.00
1250MS-12TW-U	13.75	20.25
1250MS-13TW-U	15.00	21.50
1250MS-14TW-U	16.25	22.75
1250MS-15TW-U	17.50	24.00
1250MS-16TW-U	18.75	25.25
1250MS-17TW-U	20.00	26.50
1250MS-18TW-U	21.25	27.75

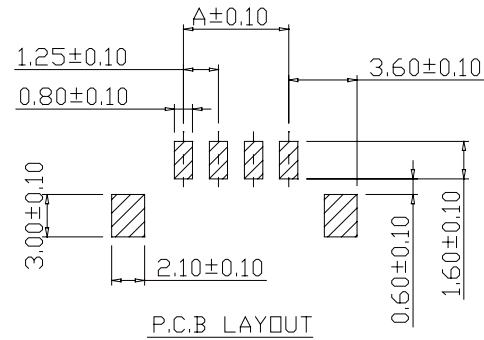

Part No.:1250MS-XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:1250MS-XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	