

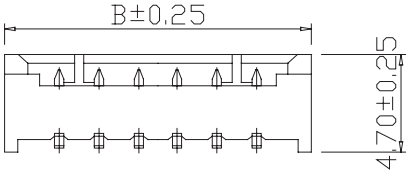



PAGE	264	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
				ALLEN RELEASE TO PRODUCTION	2007,9,3	1.0

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1250R-02TW-U	1.25	4.25
1250R-03TW-U	2.25	5.50
1250R-04TW-U	3.75	6.75
1250R-05TW-U	5.00	8.00
1250R-06TW-U	6.25	9.25
1250R-07TW-U	7.50	10.50
1250R-08TW-U	8.75	11.75
1250R-09TW-U	10.00	13.00
1250R-10TW-U	11.25	14.25
1250R-11TW-U	12.50	15.50
1250R-12TW-U	13.75	16.75
1250R-13TW-U	15.00	18.00
1250R-14TW-U	16.25	19.25
1250R-15TW-U	17.50	20.50
1250R-16TW-U	18.75	21.75
1250R-17TW-U	20.00	23.00
1250R-18TW-U	21.25	24.25



Part No.:1250R-XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.1250R-XXTW-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
							Tel: 0769 22020068	Fax: 0769 22020069	E-mail: sales@vigortec.com