



PAGE	264	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
				ALLEN RELEASE TO PRODUCTION	2007,9,3	1.0



SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25℃ ~ +85℃
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin-plated
Material: Nylon 6T, UL94V-0
Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1250S-02TW-U	1.25	4.25
1250S-03TW-U	2.25	5.50
1250S-04TW-U	3.75	6.75
1250S-05TW-U	5.00	8.00
1250S-06TW-U	6.25	9.25
1250S-07TW-U	7.50	10.50
1250S-08TW-U	8.75	11.75
1250S-09TW-U	10.00	13.00
1250S-10TW-U	11.25	14.25
1250S-11TW-U	12.50	15.50
1250S-12TW-U	13.75	16.75
1250S-13TW-U	15.00	18.00
1250S-14TW-U	16.25	19.25
1250S-15TW-U	17.50	20.50
1250S-16TW-U	18.75	21.75
1250S-17TW-U	20.00	23.00
1250S-18TW-U	21.25	24.25



P.C.B LAYOUT

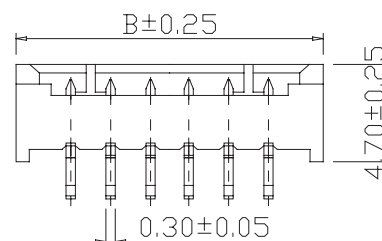

Part No.:1250S-XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.1250S-XXTW-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068		Fax: 0769 22020069