





SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $20\text{m}\Omega$ Max
 Insulation Resistance: $100\text{m}\Omega$ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: 472C

PART NO.	Dimensions	
	A	B
1251R-02TR-L	1.25	4.25
1251R-03TR-L	2.50	5.50
1251R-04TR-L	3.75	6.75
1251R-05TR-L	5.00	8.00
1251R-06TR-L	6.25	9.25
1251R-07TR-L	7.50	10.50
1251R-08TR-L	8.75	11.75
1251R-09TR-L	10.00	13.00
1251R-10TR-L	11.25	14.25
1251R-11TR-L	12.50	15.50
1251R-12TR-L	13.75	16.75
1251R-13TR-L	15.00	18.00
1251R-14TR-L	16.25	19.25
1251R-15TR-L	17.50	20.50

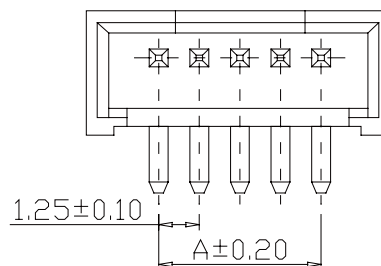

P.C.B LAYOUT

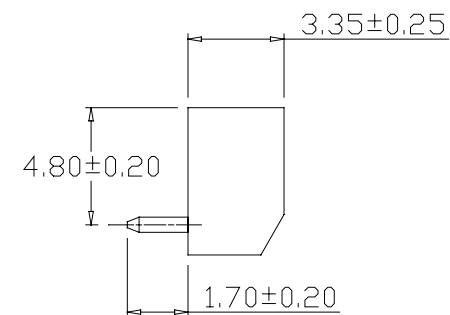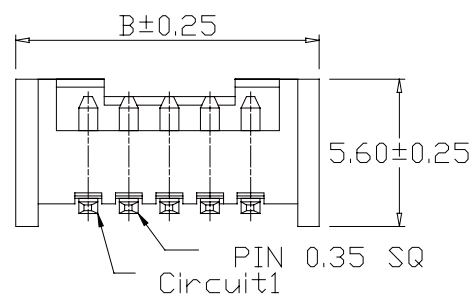

Part No.:1251R-XXTR-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:1251R-XXTR-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com