


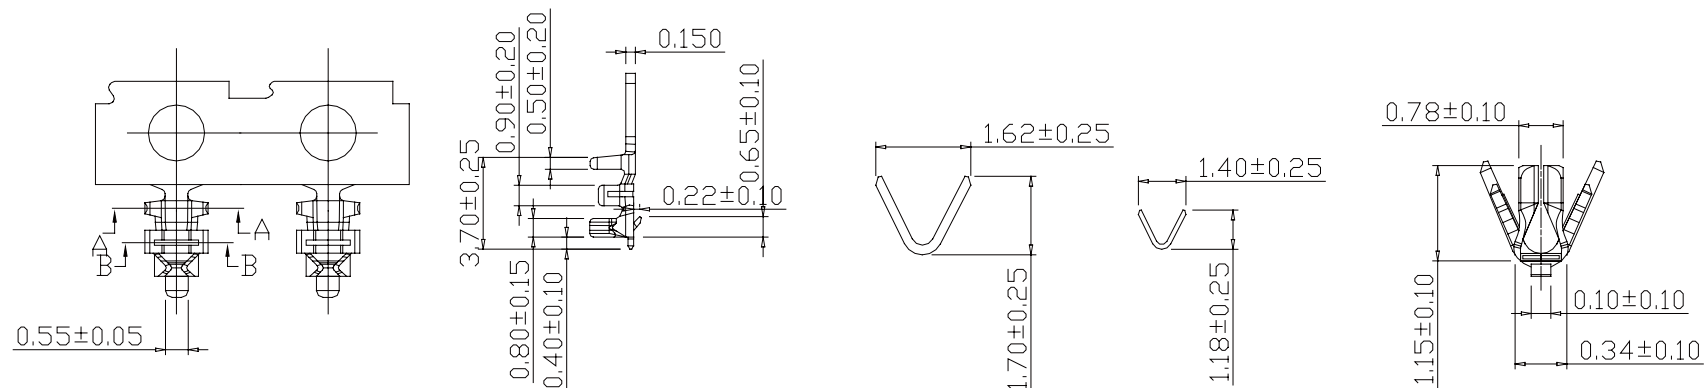


Wire Range	Insulation □.D	Material	Finish	Qty/reel
AWG#26-#30	1.00mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

Part No.:1252-T-L

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66, UL94V-0
 Pantone Color: 7529~7530C

PART NO.	Dimensions	
	A	B
1252H-205W-L	5.00	10.40
1252H-207W-L	7.50	12.90
1252H-210W-L	11.25	16.65
1252H-215W-L	17.50	22.90
1252H-220W-L	23.75	29.15

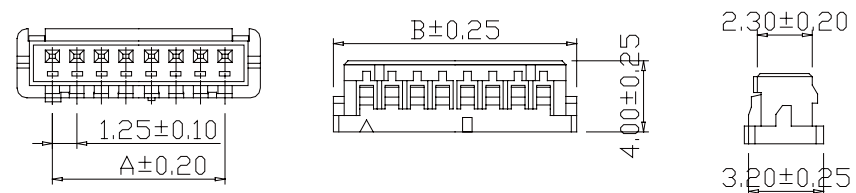

Part No.:1252H-2XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No:1252H-2XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	