

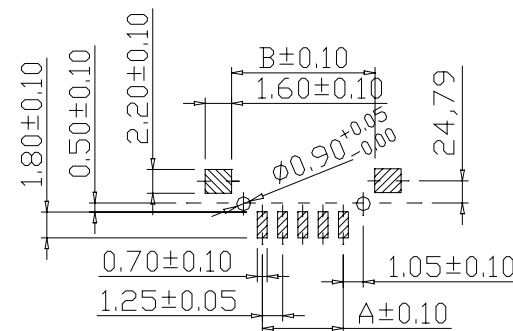



SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass /Tin-plated
 Solder Tabs: Phosphor Bronze/Tin-plated
 Cap: Nylon 6T, UL94V-0, Natural(Beige)
 Wafer: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PART NO.	Dimensions		
	A	B	C
1252MR-102TW-U	1.25	4.15	6.25
1252MR-103TW-U	2.50	5.40	7.50
1252MR-104TW-U	3.75	6.65	8.75
1252MR-105TW-U	5.00	7.90	10.00
1252MR-106TW-U	6.25	9.15	11.25
1252MR-107TW-U	7.50	10.40	12.50
1252MR-108TW-U	8.75	11.65	13.75
1252MR-109TW-U	10.00	12.90	15.00
1252MR-110TW-U	11.25	14.15	16.25
1252MR-111TW-U	12.50	15.40	17.50
1252MR-112TW-U	13.75	16.65	18.75
1252MR-113TW-U	15.00	17.90	20.00
1252MR-114TW-U	16.25	19.15	21.25
1252MR-115TW-U	17.50	20.40	22.50

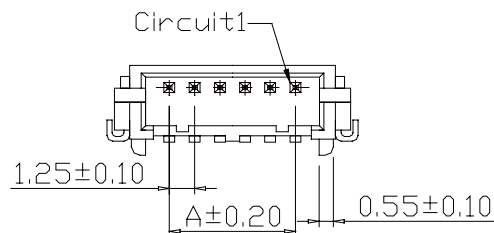

P.C.B LAYOUT

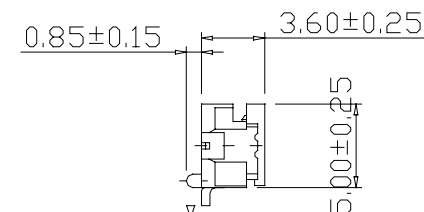

PartNo.: 1252M R-XX TW -U

APPRO	CHECK	DRAWN	PART NO.	Part No.:1252MR-XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	