

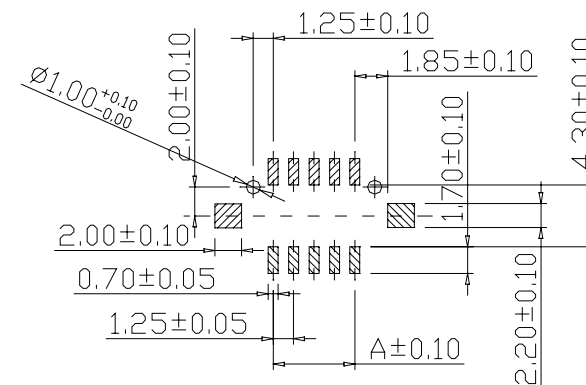
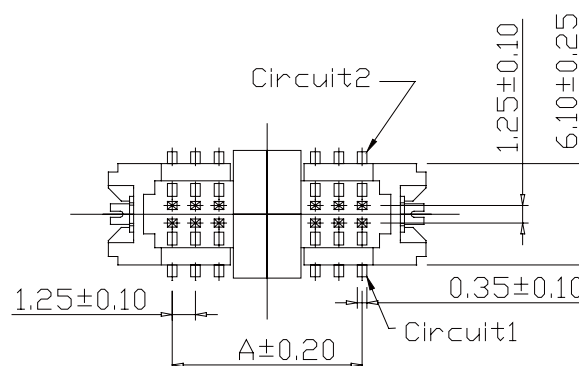


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass /Tin-plated
 Solder Tabs: Brass/Tin-plated
 Cap: Nylon 6T, UL94V-0, Natural(Beige)
 Wafer: Nylon 6T, UL94V-0
 Color: Natural(Beige)



PART NO.	Dimensions	
	A	B
1252MS-205TW-U	5.00	12.50
1252MS-207TW-U	7.50	15.00
1252MS-210TW-U	11.25	18.75
1252MS-215TW-U	17.50	25.00
1252MS-220TW-U	23.75	31.25

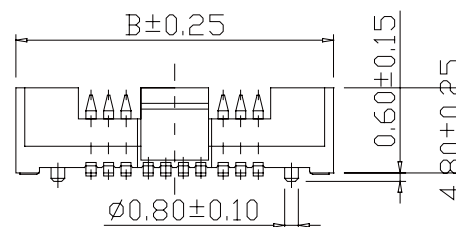

PartNo.:1252M S-2X X TW -U

APPRO	CHECK	DRAWN	PART NO.	Part No.:1252MS-2XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	