



SPECIFICATIONS



Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Brass /Tin-plated
Material: Nylon 66, UL94V-0
Pantone Color: 7529~7530C

PART NO.	Dimensions	
	A	B
1252S-02TW-L	1.25	3.75
1252S-03TW-L	2.50	5.00
1252S-04TW-L	3.75	6.25
1252S-05TW-L	5.00	7.50
1252S-06TW-L	6.25	8.75
1252S-07TW-L	7.50	10.00
1252S-08TW-L	8.75	11.25
1252S-09TW-L	10.00	12.50
1252S-10TW-L	11.25	13.75
1252S-11TW-L	12.50	15.00
1252S-12TW-L	13.75	16.25
1252S-13TW-L	15.00	17.50
1252S-14TW-L	16.25	18.75
1252S-15TW-L	17.50	20.00

PartNo.:1252S-XXTW-L

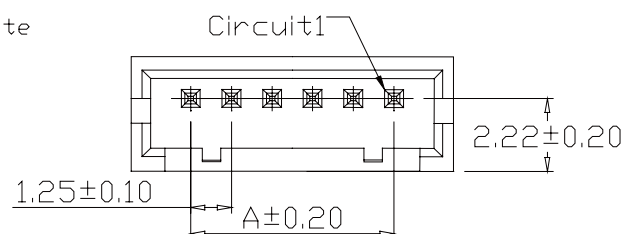

P.C.B LAYOUT

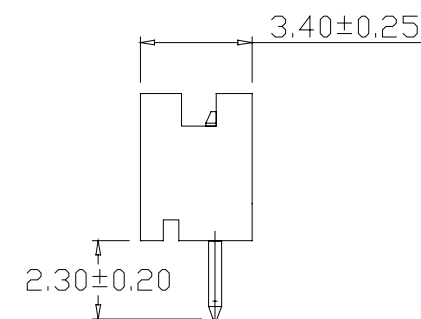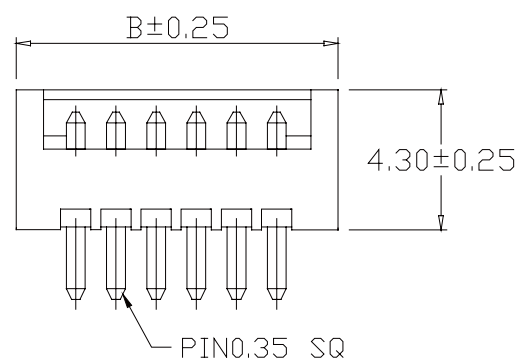

APPRO	CHECK	DRAWN	PART NO.	Part No.:1252S-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	