



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

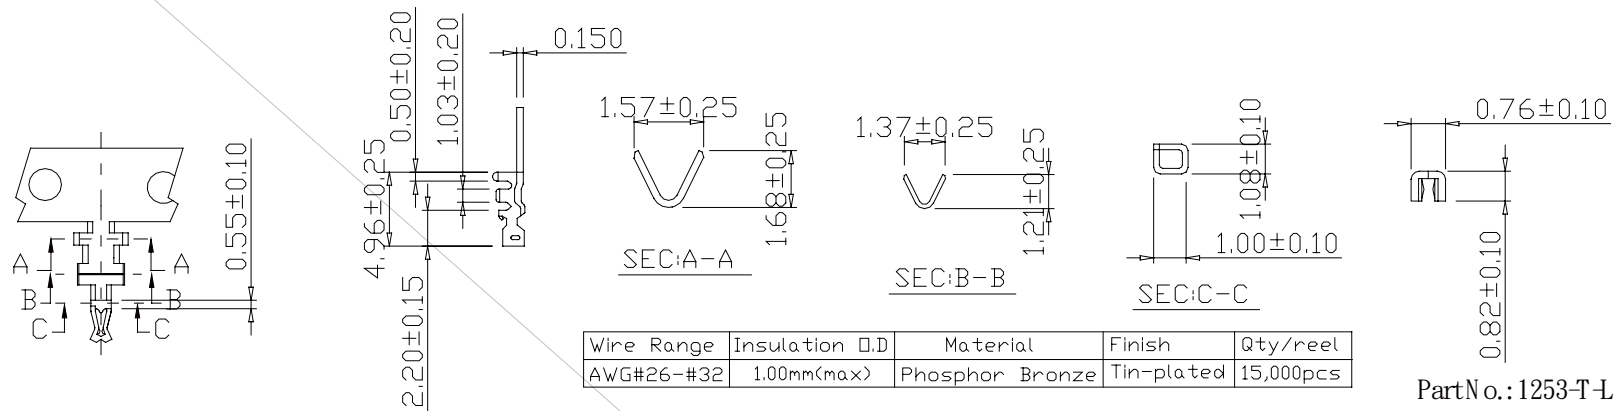

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66, UL94V-0
 Pantone Color: 7529C

PART NO.	Dimensions	
	A	B
1253H-02W-L	1.25	4.35
1253H-03W-L	2.50	5.60
1253H-04W-L	3.75	6.85
1253H-05W-L	5.00	8.10
1253H-06W-L	6.25	9.35
1253H-07W-L	7.50	10.60
1253H-08W-L	8.75	11.85
1253H-09W-L	10.00	13.10
1253H-10W-L	11.25	14.35
1253H-11W-L	12.50	15.60
1253H-12W-L	13.75	16.85
1253H-13W-L	15.00	18.10
1253H-14W-L	16.25	19.35
1253H-15W-L	17.50	20.60
1253H-20W-L	23.75	26.85
1253H-25W-L	30.00	33.10
1253H-30W-L	36.25	39.35

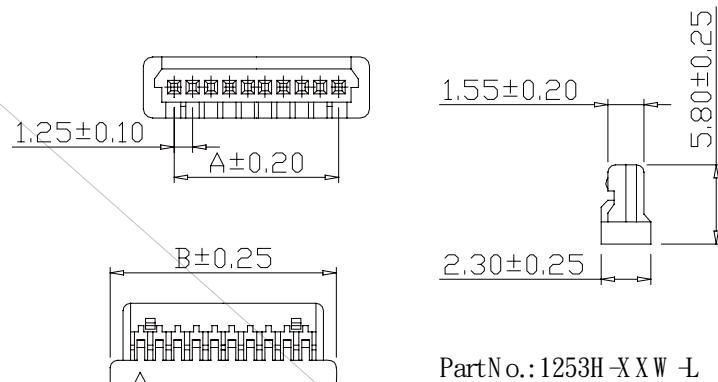

APPRO	CHECK	DRAWN	PART NO.	Part No.:1253H-XXW-L	DESCRIPTION	VIGORTEC
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	