



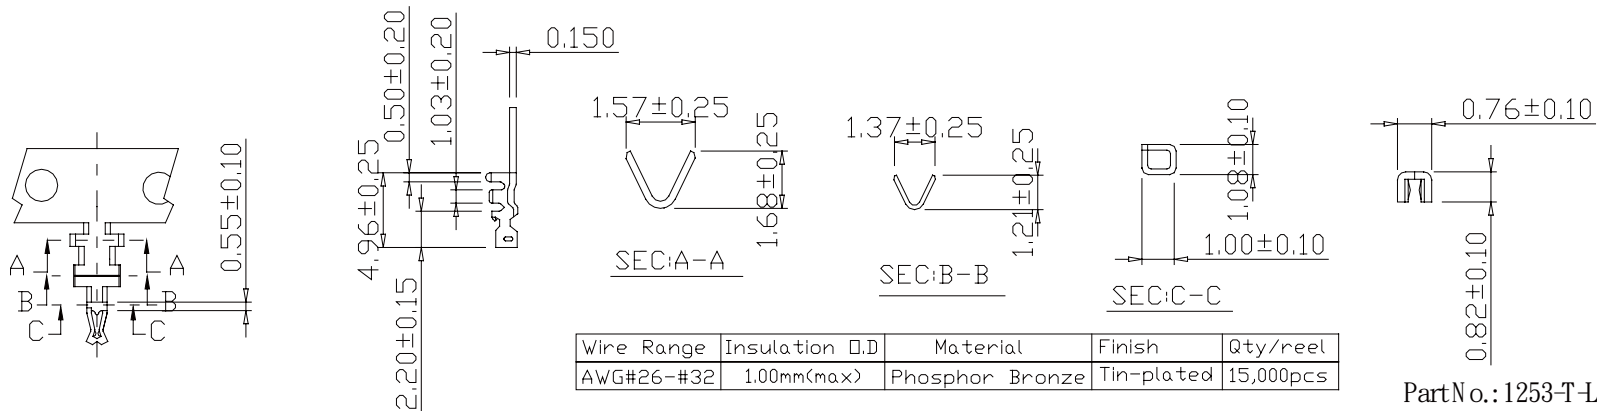

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PartNo.: 1253M R-XXTW-U

PART NO.	Dimensions	
	A	B
1253MR-02W-U	1.25	7.45
1253MR-03W-U	2.50	8.70
1253MR-04W-U	3.75	9.95
1253MR-05W-U	5.00	11.20
1253MR-06W-U	6.25	12.45
1253MR-07W-U	7.50	13.70
1253MR-08W-U	8.75	14.95
1253MR-09W-U	10.00	16.20
1253MR-10W-U	11.25	17.45
1253MR-11W-U	12.50	18.70
1253MR-12W-U	13.75	19.95
1253MR-13W-U	15.00	21.20
1253MR-14W-U	16.25	22.45
1253MR-15W-U	17.50	23.70
1253MR-20W-U	23.75	29.95
1253MR-25W-U	30.00	36.20
1253MR-30W-U	36.25	42.45

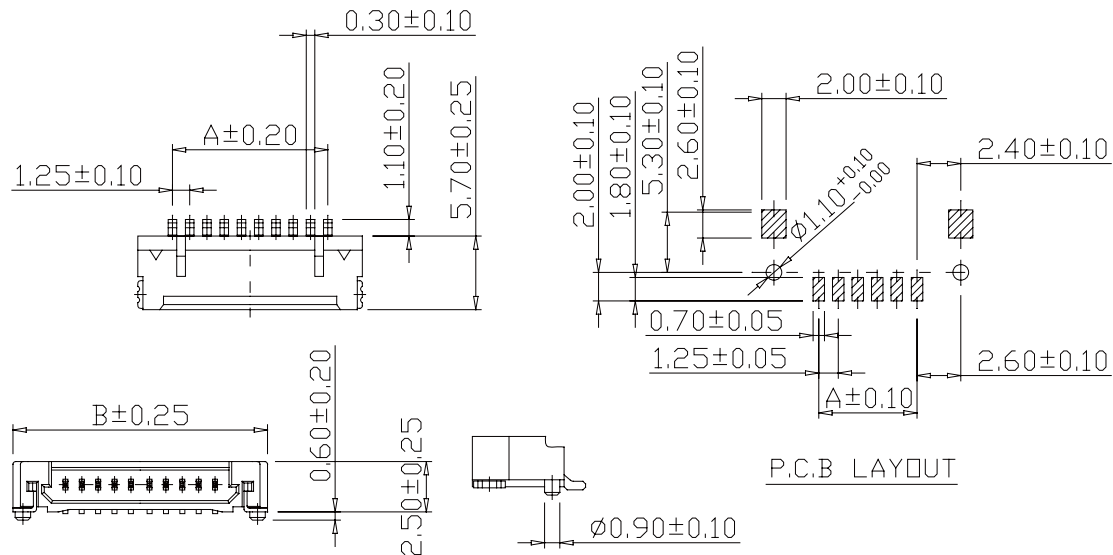

APPRO	CHECK	DRAWN	PART NO.	Part No.:1253MR-XXTW-U	DESCRIPTION	VIGORTEC
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	