


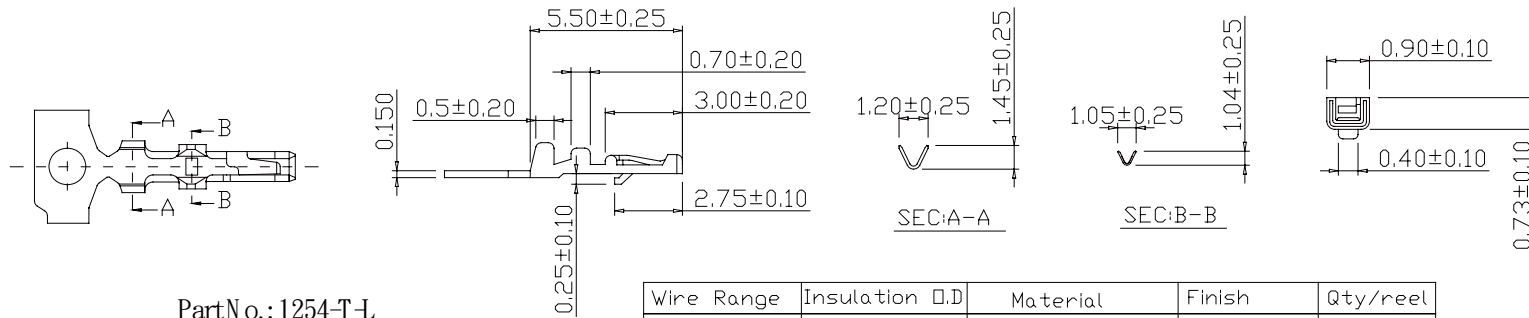

PartNo.:1254-T-L


Wire Range	Insulation □.D	Material	Finish	Qty/reel
AWG#26-#32	0.90mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $20\text{m}\Omega$ Max
 Insulation Resistance: $100\text{m}\Omega$ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66, UL94V-0
 Color: Natural(Beige)

PartNo.:1254H-XXW-L

PART NO.	Dimensions		
	A	B	C
1254MR-02GW-U	1.25	7.65	7.97
1254MR-03GW-U	2.50	8.90	9.22
1254MR-04GW-U	3.75	10.15	10.47
1254MR-05GW-U	5.00	11.40	11.72
1254MR-06GW-U	6.25	12.65	12.97
1254MR-07GW-U	7.50	13.90	14.22
1254MR-08GW-U	8.75	15.15	15.47
1254MR-09GW-U	10.00	16.40	16.72
1254MR-10GW-U	11.25	17.65	17.97
1254MR-11GW-U	12.50	18.90	19.22
1254MR-12GW-U	13.75	20.15	20.47
1254MR-14GW-U	16.25	22.65	22.97
1254MR-15GW-U	17.50	23.90	24.22
1254MR-16GW-U	18.75	25.15	25.47
1254MR-20GW-U	23.75	30.15	30.47
1254MR-30GW-U	36.25	42.65	42.97

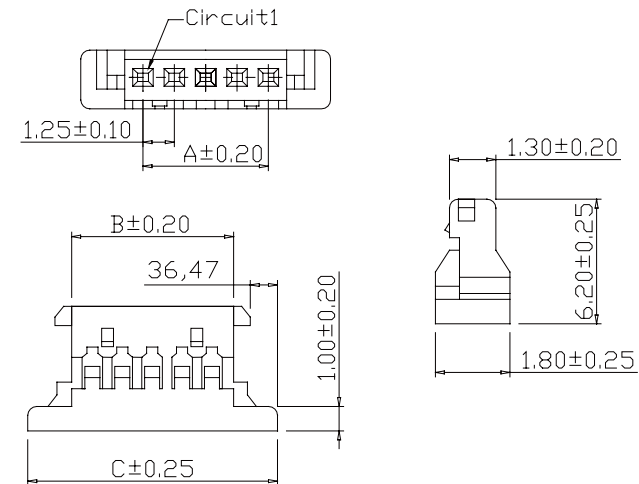

APPRO	CHECK	DRAWN	PART NO.	Part No.:1254H-XXW-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

