



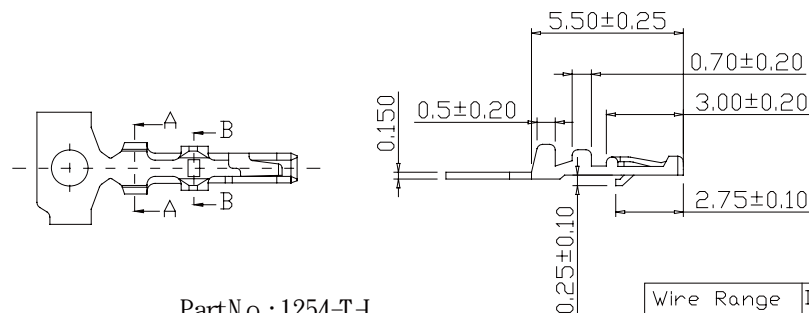

Part No.: 1254-T-L

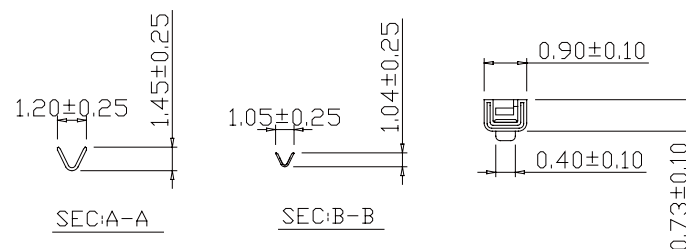



Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#26-#32	0.90mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Material: Nylon 6T, UL94V-0
Color: Natural(Beige)

PART NO.	Dimensions		
	A	B	C
1254H-02W-L	1.25	2.72	6.25
1254H-03W-L	2.50	3.97	7.50
1254H-04W-L	3.75	5.22	8.75
1254H-05W-L	5.00	6.47	10.00
1254H-06W-L	6.25	7.72	11.25
1254H-07W-L	7.50	8.97	12.50
1254H-08W-L	8.75	10.22	13.75
1254H-09W-L	10.00	11.47	15.00
1254H-10W-L	11.25	12.72	16.25
1254H-11W-L	12.50	13.97	17.50
1254H-12W-L	13.75	15.22	18.75
1254H-14W-L	16.25	17.72	21.25
1254H-15W-L	17.50	18.97	22.50
1254H-16W-L	18.75	20.22	22.50
1254H-20W-L	23.75	25.22	22.50
1254H-30W-L	36.25	37.72	22.50

PartNo.:1254M R-XXGW -U

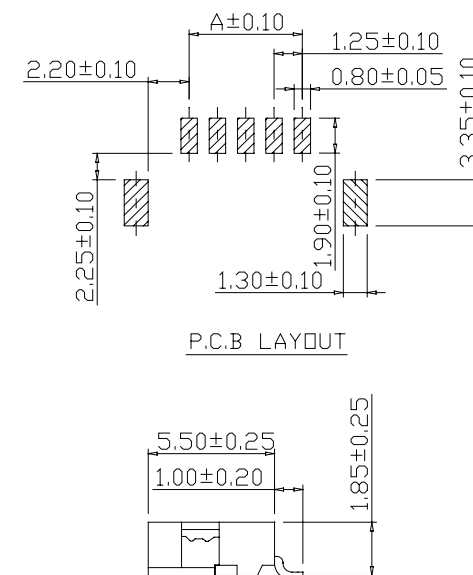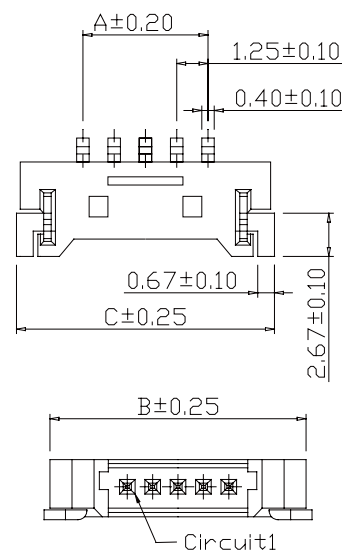

APPRO	CHECK	DRAWN	PART NO.	Part No.:1254MR-XXGW-U		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com