



SEC:A-A



SEC:B-B





PartNo.: 1255-T-L



Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#26-#32	0.90mm(max)	Phosphor Bronze	Gold-flash	15,000pcs

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-flash
 Solder Tabs: Phosphor Bronze/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PART NO.	Dimensions		
	A	B	C
1255MR-02GB-U	1.25	6.10	4.01
1255MR-03GB-U	2.50	7.35	5.26
1255MR-04GB-U	3.75	8.60	6.51
1255MR-05GB-U	5.00	9.85	7.76
1255MR-06GB-U	6.25	11.10	9.01
1255MR-08GB-U	8.75	13.60	11.51
1255MR-10GB-U	11.25	16.10	12.01
1255MR-15GB-U	17.50	22.35	20.26
1255MR-20GB-U	23.75	28.60	26.51
1255MR-25GB-U	30.00	34.85	32.76
1255MR-30GB-U	36.25	41.10	39.01

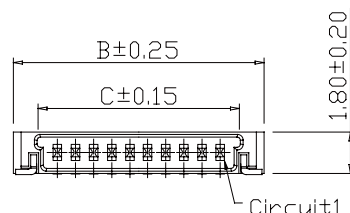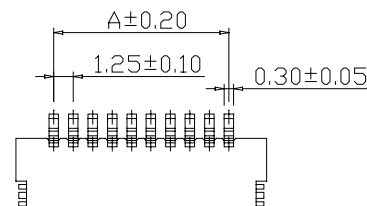


Circuit1

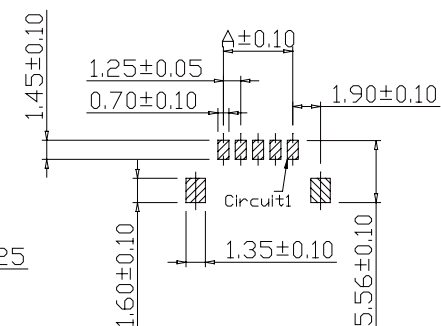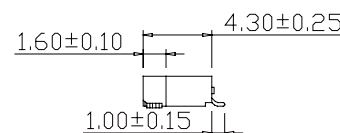

P.C.B LAYOUT

PartNo.: 1255MR-XXGB-U

APPRO	CHECK	DRAWN	PART NO.	Part No:1255MR-XXGB-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	