



PAGE	274	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

SPECIFICATIONS



Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated 3u"
 Shell: Phosphor Bronze/Tin-plated
 Cap: Nylon 6T, UL94V-0, Natural(Black)
 Material: Nylon 6T, UL94V-0
 Color: Natural(Black)

PART NO.	Dimensions	
	A	B
1256MRA-21TB-U	12.50	16.55
1256MRA-31TB-U	18.75	22.80
1256MRA-41TB-U	25.00	29.05

Part No.: 1256M R-XX TB-U

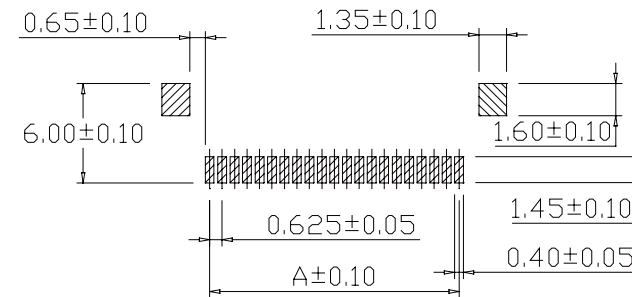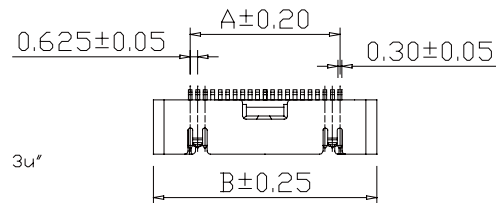

SUGGESTED PCB LAYOUT (COMPONENT SIDE)

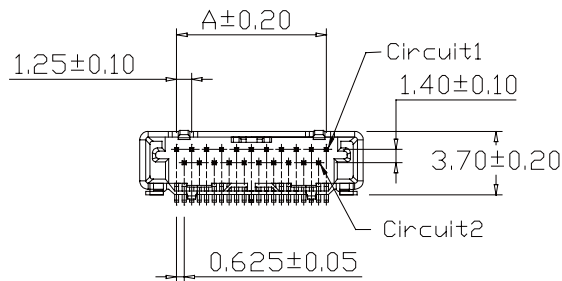

APPRO	CHECK	DRAWN	PART NO.	Part No.:1256MR-XXTB-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				