


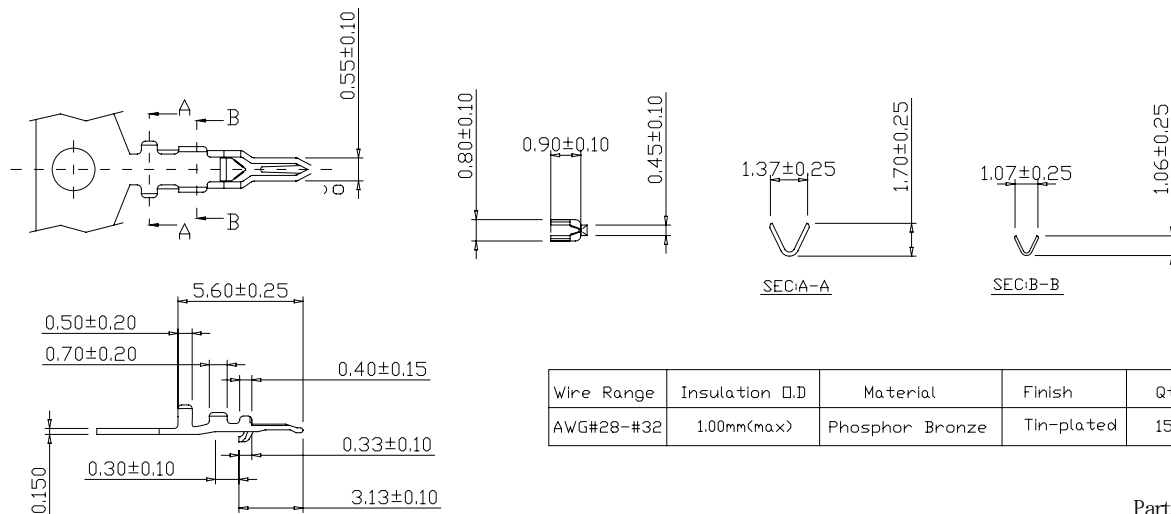


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#28~#32	1.00mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

Part No.: 1257-T-L

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100mΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
1257H-02W-L	1.25	3.05
1257H-03W-L	2.50	4.30
1257H-04W-L	3.75	5.55
1257H-05W-L	5.00	6.80
1257H-06W-L	6.25	8.05
1257H-07W-L	7.50	9.30
1257H-08W-L	8.75	10.55
1257H-09W-L	10.00	11.80
1257H-10W-L	11.25	13.05
1257H-11W-L	12.50	14.30
1257H-12W-L	13.75	15.55
1257H-13W-L	15.00	16.80
1257H-14W-L	16.25	18.05
1257H-15W-L	17.50	19.30

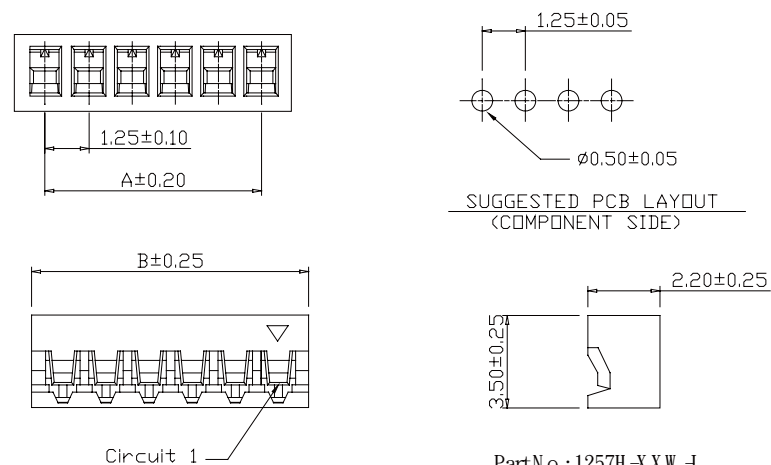

APPRO	CHECK	DRAWN	PART NO.	Part No:1257H-XXW-L			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		