





PAGE	276	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0


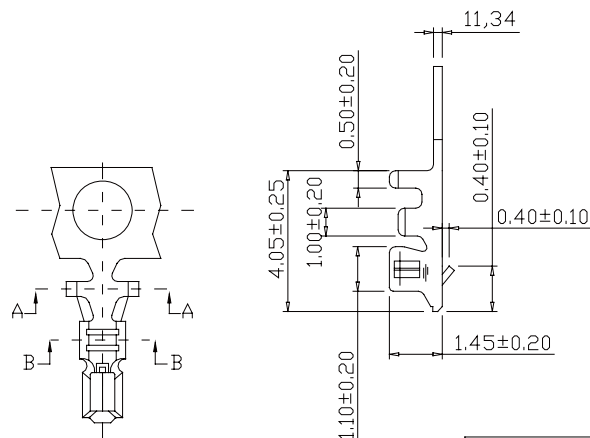


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#26-#32	1.10mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

PartNo.: 1500-T-L

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25℃ ~ +85℃
Contact Resistance: 20mΩ Max
Insulation Resistance: 500mΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
1500H-02W-L	1.50	4.50
1500H-03W-L	3.00	6.00
1500H-04W-L	4.50	7.50
1500H-05W-L	6.00	9.00
1500H-06W-L	7.50	10.50
1500H-07W-L	9.00	12.00
1500H-08W-L	10.50	13.50
1500H-09W-L	12.00	15.00
1500H-10W-L	13.50	16.50
1500H-11W-L	15.00	18.00
1500H-12W-L	16.50	19.50
1500H-13W-L	18.00	21.52

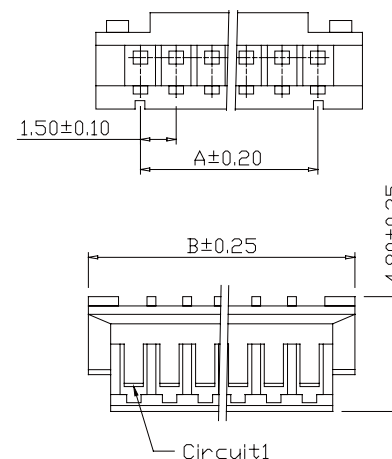

PartNo.: 1500H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:1500H-XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	