
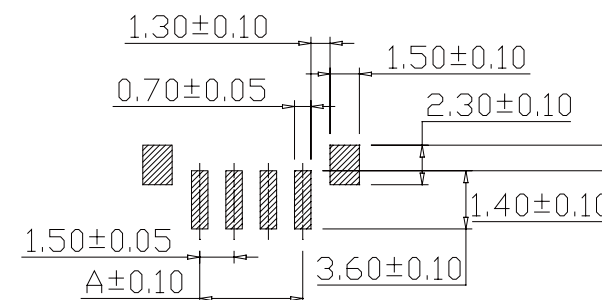



SPECIFICATIONS


Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $20\text{m}\Omega$ Max
 Insulation Resistance: $500\text{m}\Omega$ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1500MR-02TW-U	1.50	6.00
1500MR-03TW-U	3.00	7.50
1500MR-04TW-U	4.50	9.00
1500MR-05TW-U	6.00	10.50
1500MR-06TW-U	7.50	12.00
1500MR-07TW-U	9.00	13.50
1500MR-08TW-U	10.50	15.00
1500MR-09TW-U	12.00	16.50
1500MR-10TW-U	13.50	18.00
1500MR-11TW-U	15.00	19.50
1500MR-12TW-U	16.50	21.00
1500MR-13TW-U	18.00	22.00

PartNo.:1500M S-XXTW -U

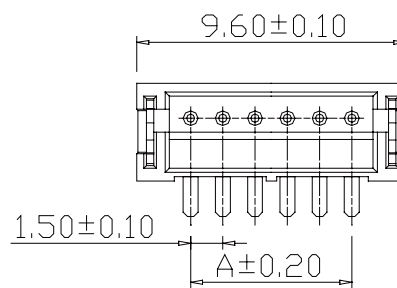

P.C.B LAYOUT



APPRO

CHECK

DRAWN

PART NO.

Part No.:1500MS-XXTW-U

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com