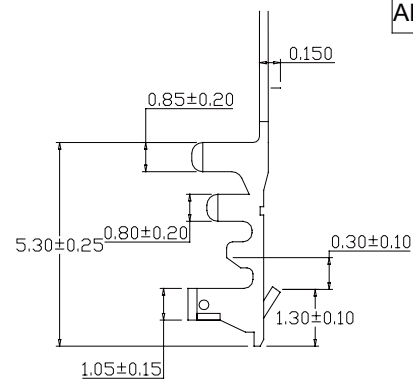
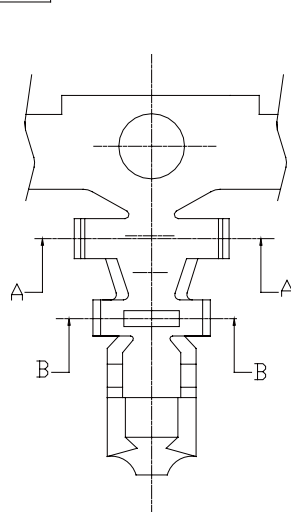




Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#24-#28	1.10mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

PartNo.: 1501-T-L

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 350V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions	
	A	B
1501H-02TW-L	1.50	4.50
1500S-03TW-L	3.00	6.00
1500S-04TW-L	4.50	7.50
1500S-05TW-L	6.00	9.00
1500S-06TW-L	7.50	10.50
1500S-07TW-L	9.00	12.00
1500S-08TW-L	10.50	13.50
1500S-09TW-L	12.00	15.00
1500S-10TW-L	13.50	16.50
1500S-11TW-L	15.00	18.00
1500S-12TW-L	16.50	19.50
1500S-13TW-L	18.00	21.00

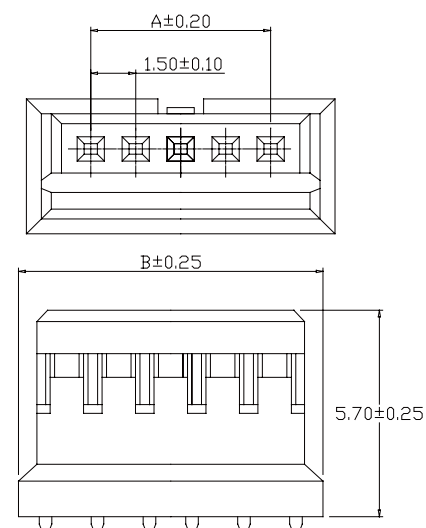

PartNo.: 1501H-XXW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:1501H-XXW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com