
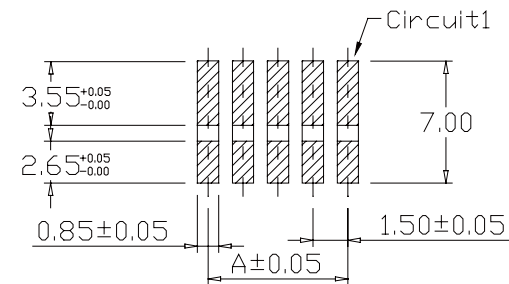


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 350V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 6T, UL94V-0
Color: Natural(Beige)


PART NO.	Dimensions	
	A	B
1501MR-02TW-U	1.50	4.30
1501MR-03TW-U	3.00	5.80
1501MR-04TW-U	4.50	7.30
1501MR-05TW-U	6.00	8.80
1501MR-06TW-U	7.50	10.30
1501MR-07TW-U	9.00	11.80
1501MR-08TW-U	10.50	13.30
1501MR-09TW-U	12.00	14.80
1501MR-10TW-U	13.50	16.30
1501MR-11TW-U	15.00	17.80
1501MR-12TW-U	16.50	19.30
1501MR-13TW-U	18.00	20.80
1501MR-14TW-U	19.50	22.30
1501MR-15TW-U	21.00	23.80

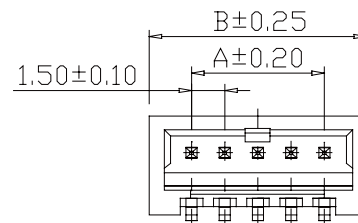

P.C.B LAYOUT

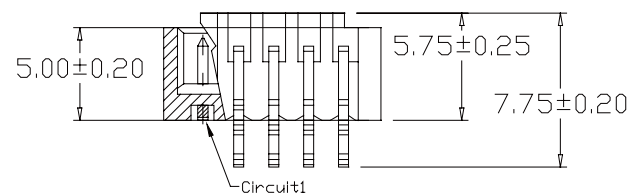

PartNo.:1501M R-XXTW -U

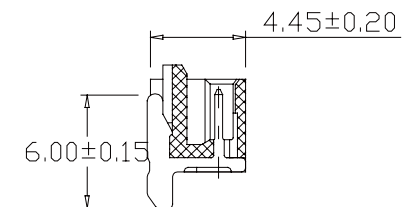

APPRO	CHECK	DRAWN	PART NO.	Part No.:1501MR-XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				