

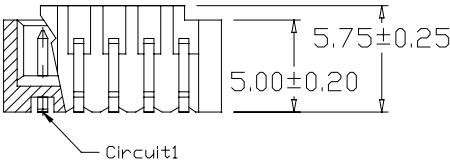
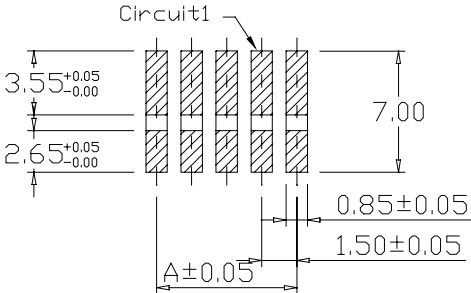


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 350V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1501MS-02TW-U	1.50	4.30
1501MS-03TW-U	3.00	5.80
1501MS-04TW-U	4.50	7.30
1501MS-05TW-U	6.00	8.80
1501MS-06TW-U	7.50	10.30
1501MS-07TW-U	9.00	11.80
1501MS-08TW-U	10.50	13.30
1501MS-09TW-U	12.00	14.80
1501MS-10TW-U	13.50	16.30
1501MS-11TW-U	15.00	17.80
1501MS-12TW-U	16.50	19.30
1501MS-13TW-U	18.00	20.80
1501MS-14TW-U	19.50	22.30
1501MS-15TW-U	21.00	23.80



PartNo.: 1501M S-XXTW -U