
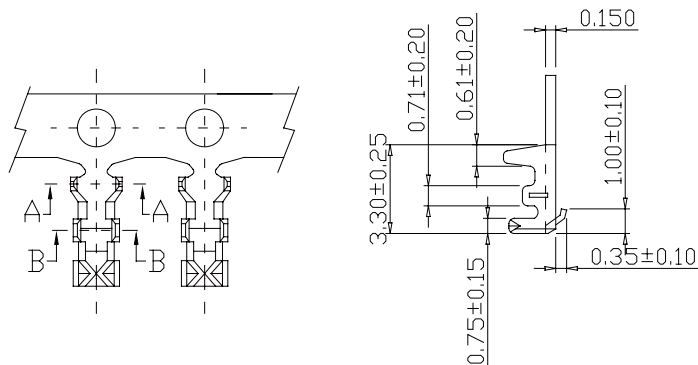


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#28-#32	1.00mm(max)	Phosphor Bronze	Gold-Flash	15,000pcs

Part No.:1250-T-L

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: PBT, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions	
	A	B
1250H-02W-L	1.25	4.25
1250H-03W-L	2.25	5.50
1250H-04W-L	3.75	6.75
1250H-05W-L	5.00	8.00
1250H-06W-L	6.25	9.25
1250H-07W-L	7.50	10.50
1250H-08W-L	8.75	11.75
1250H-09W-L	10.00	13.00
1250H-10W-L	11.25	14.25
1250H-11W-L	12.50	15.50
1250H-12W-L	13.75	16.75
1250H-13W-L	15.00	18.00
1250H-14W-L	16.25	19.25
1250H-15W-L	17.50	20.50
1250H-16W-L	18.75	21.75
1250H-17W-L	20.00	23.00
1250H-18W-L	21.25	24.25

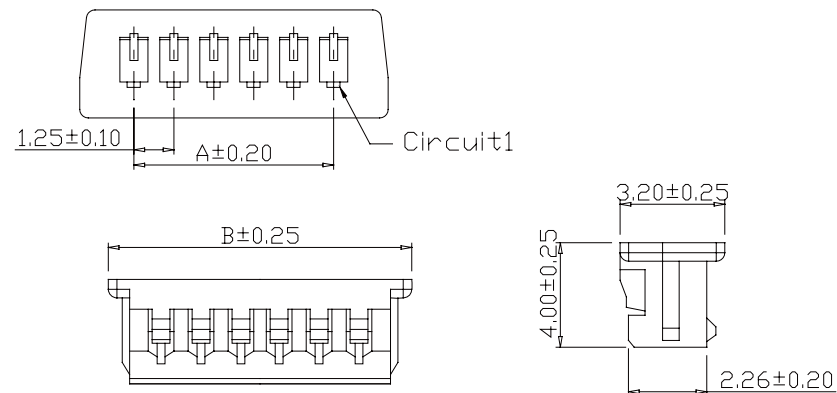

Part No.:1250H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:1250H-XXW-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com