




SEC:A-A



SEC:B-B



SEC:C-C



SEC:D-D



Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#26-#30	1.40mm(max)	Phosphor Bronze	Gold-plated	10,000pcs

PartNo.:2000-T-L

SPECIFICATIONS
 Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66, UL94V-0
 Color: Black

PartNo.:2000H-1XXB-L

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2000H-102B-L	2.00	4.20	2000H-117B-L	32.00	34.20
2000H-103B-L	4.00	6.20	2000H-118B-L	34.00	36.20
2000H-104B-L	6.00	8.20	2000H-119B-L	36.00	38.20
2000H-105B-L	8.00	10.20	2000H-120B-L	38.00	40.20
2000H-106B-L	10.00	12.20	2000H-121B-L	40.00	42.20
2000H-107B-L	12.00	14.20	2000H-122B-L	42.00	44.20
2000H-108B-L	14.00	16.20	2000H-123B-L	44.00	46.20
2000H-109B-L	16.00	18.20	2000H-124B-L	46.00	48.20
2000H-110B-L	18.00	20.20	2000H-125B-L	48.00	50.20
2000H-111B-L	20.00	22.20	2000H-126B-L	50.00	52.20
2000H-112B-L	22.00	24.20	2000H-127B-L	52.00	54.20
2000H-113B-L	24.00	26.20	2000H-128B-L	54.00	56.20
2000H-114B-L	26.00	28.20	2000H-129B-L	56.00	58.20
2000H-115B-L	28.00	30.20	2000H-130B-L	58.00	60.20
2000H-116B-L	30.00	32.20			

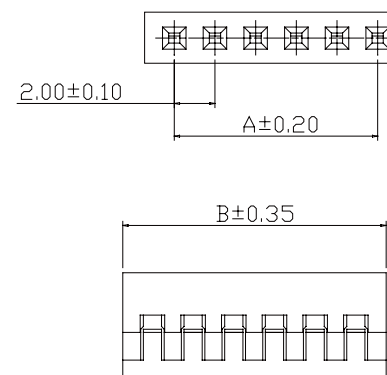

APPRO	CHECK	DRAWN	PART NO.	Part No.:2000H-1XXB-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com