


PAGE	282	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0

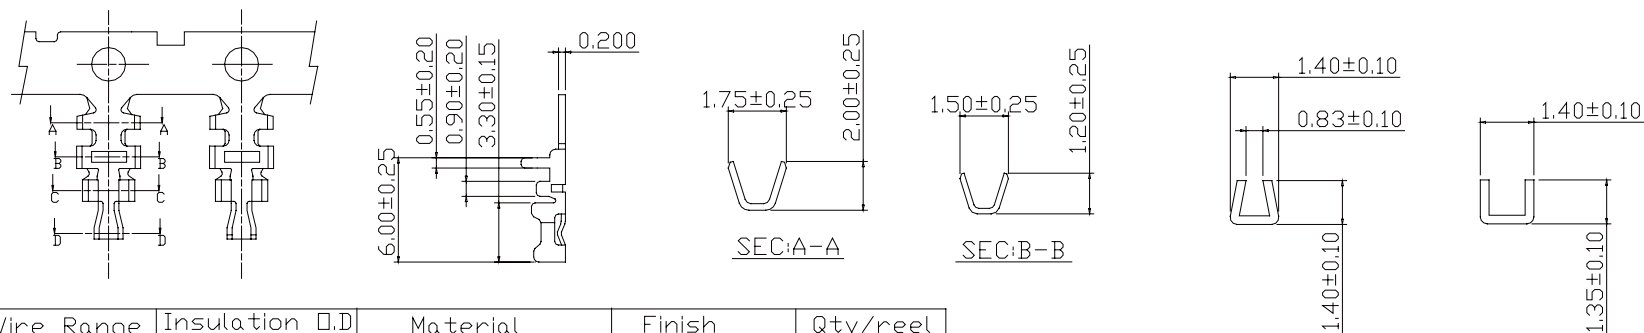


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#26-#30	1.40mm(max)	Phosphor Bronze	Gold-plated	10,000pcs

Part No.: 2000-T-L

SEC:C-C

SEC:D-D

SPECIFICATIONS
Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66, UL94V-0
Color: Black

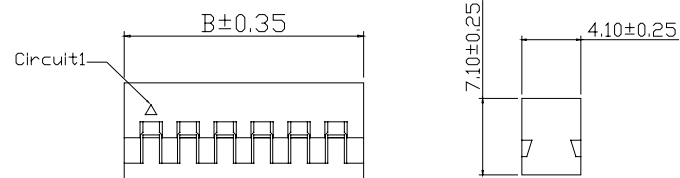

Part No.: 2000H-2XXB-L

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2000H-202B-L	2.00	4.20	2000H-222B-L	42.00	44.20
2000H-203B-L	4.00	6.20	2000H-223B-L	44.00	46.20
2000H-204B-L	6.00	8.20	2000H-224B-L	46.00	48.20
2000H-205B-L	8.00	10.20	2000H-225B-L	48.00	50.20
2000H-206B-L	10.00	12.20	2000H-226B-L	50.00	52.20
2000H-207B-L	12.00	14.20	2000H-227B-L	52.00	54.20
2000H-208B-L	14.00	16.20	2000H-228B-L	54.00	56.20
2000H-209B-L	16.00	18.20	2000H-229B-L	56.00	58.20
2000H-210B-L	18.00	20.20	2000H-230B-L	58.00	60.20
2000H-211B-L	20.00	22.20	2000H-231B-L	60.00	62.20
2000H-212B-L	22.00	24.20	2000H-232B-L	62.00	64.20
2000H-213B-L	24.00	26.20	2000H-233B-L	64.00	66.20
2000H-214B-L	26.00	28.20	2000H-234B-L	66.00	68.20
2000H-215B-L	28.00	30.20	2000H-235B-L	68.00	70.20
2000H-216B-L	30.00	32.20	2000H-236B-L	70.00	72.20
2000H-217B-L	32.00	34.20	2000H-237B-L	72.00	74.20
2000H-218B-L	34.00	36.20	2000H-238B-L	74.00	76.20
2000H-219B-L	36.00	38.20	2000H-239B-L	76.00	78.20
2000H-220B-L	38.00	40.20	2000H-240B-L	78.00	80.20
2000H-221B-L	40.00	42.20			

APPRO	CHECK	DRAWN	PART NO.	Part No.:2000H-2XXB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		