

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000mΩ Min




Withstanding Voltage: 800V AC/minute

Pin Material: Phosphor Bronze/Tin-plated

Material: Nylon 66, UL94V-0

Pantone Color: 4685C

PART NO.	Dimensions	
	A	B
2002R-02TW-L	2.00	6.00
2002R-03TW-L	4.00	8.00
2002R-04TW-L	6.00	10.00
2002R-05TW-L	8.00	12.00
2002R-06TW-L	10.00	14.00
2002R-07TW-L	12.00	16.00
2002R-08TW-L	14.00	18.00
2002R-09TW-L	16.00	20.00
2002R-10TW-L	18.00	22.00
2002R-11TW-L	20.00	24.00
2002R-12TW-L	22.00	26.00
2002R-13TW-L	24.00	28.00
2002R-14TW-L	26.00	30.00
2002R-15TW-L	28.00	32.00

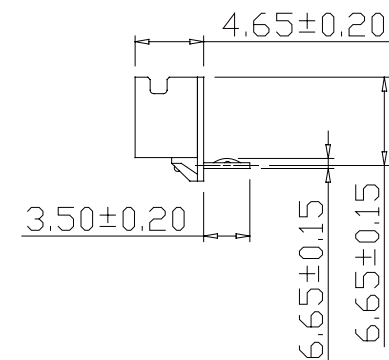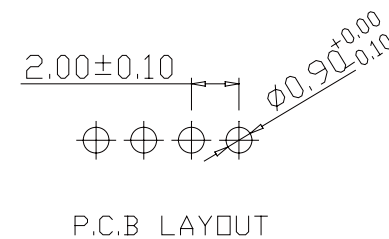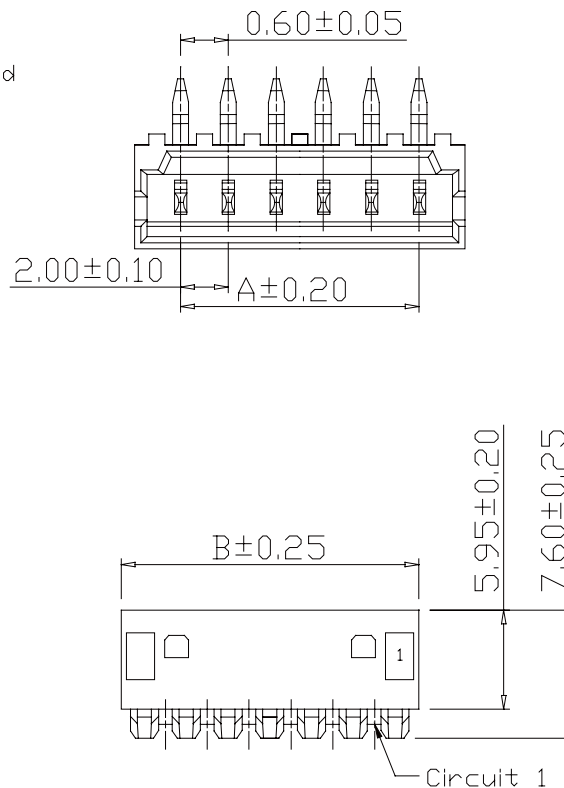

PartNo.: 2002R-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2002R-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com	