
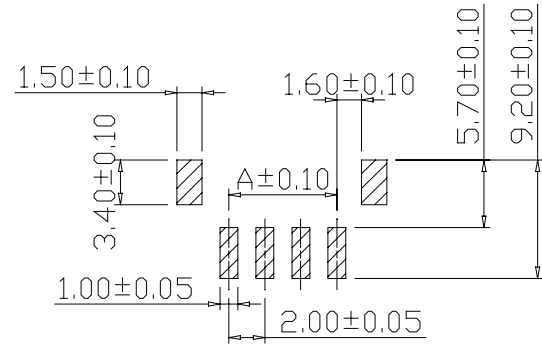
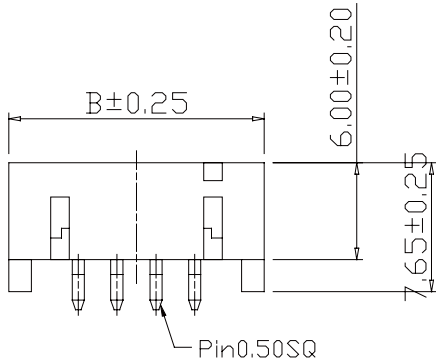



PAGE	284	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

SPECIFICATIONS
 Current Rating: 2A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
2001MR-02TW-U	2.00	8.00
2001MR-03TW-U	4.00	10.00
2001MR-04TW-U	6.00	12.00
2001MR-05TW-U	8.00	14.00
2001MR-06TW-U	10.00	16.00
2001MR-07TW-U	12.00	18.00
2001MR-08TW-U	14.00	20.00
2001MR-09TW-U	16.00	22.00
2001MR-10TW-U	18.00	24.00
2001MR-11TW-U	20.00	26.00
2001MR-12TW-U	22.00	28.00
2001MR-13TW-U	24.00	30.00
2001MR-14TW-U	26.00	32.00
2001MR-15TW-U	28.00	34.00
2001MR-16TW-U	30.00	36.00

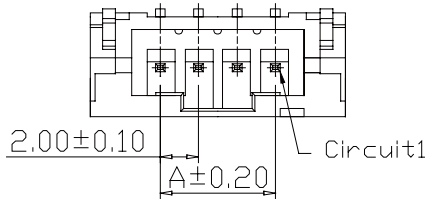

PCB LAYOUT

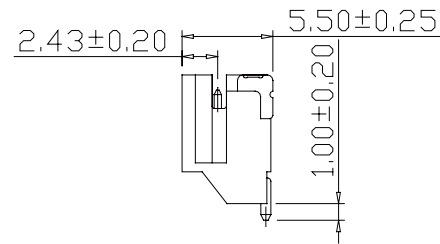

PartNo.:2001M R-XX TW -U

APPRO	CHECK	DRAWN	PART NO.	Part No.:2001MR-XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	